

## **Technical data sheet** Multiple light beam safety device receiver

Part no.: 66553500 MLD520-XR2



The Sensor People In der Braike 1, 73277 Owen

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com

Phone: +49 7021 573-0 • Fax: +49 7021 573-199

We reserve the right to make technical changes eng • 2021-01-28

## **Technical data**

# Leuze

Safety-related switching output OSSD

18.2 V

eries	MLD 500		
evice type	Receiver		
unctions			
unctions	Contactor monitoring (EDM), selectable Start/restart interlock (RES), selectable		
haracteristic parameters			
уре	4, IEC/EN 61496		
IL	3, IEC 61508		
ILCL	3, IEC/EN 62061		
erformance Level (PL)	e, EN ISO 13849-1		
ITTF <sub>d</sub>	204 years, EN ISO 13849-1		
FH <sub>D</sub>	6.6E-09 per hour		
lission time T <sub>M</sub>	20 years, EN ISO 13849-1		
ategory	4, EN ISO 13849		
optical data			
umber of beams	2 Piece(s)		
eam spacing	500 mm		
cum spucing			
lectrical data			
rotective circuit	Overvoltage protection		
	Short circuit protected		
Derfermence dete			
Performance data	24 V, DC, -20 20 %		
Supply voltage U <sub>B</sub>	150 mA, Without external load		
Current consumption, max. Fuse	External with max. 3 A		
1 436	External with max. 5 A		
Inputs			
Number of digital switching inputs	3 Piece(s)		
Switching inputs			
Туре	Digital switching input		
Switching voltage high, min.	18.2 V		
Switching voltage low, max.	2.5 V		
Switching voltage low, max. Switching voltage, typ.	2.5 V 23 V		
Switching voltage, typ.	23 V		
Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1	23 V DC 5 mA		
Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment	23 V DC 5 mA Connection 1, pin 1		
Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1	23 V DC 5 mA		
Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment Function Digital switching input 2	23 V DC 5 mA Connection 1, pin 1 Control input for start/restart interlock (RES)		
Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment Function Digital switching input 2 Assignment	23 V DC 5 mA Connection 1, pin 1 Control input for start/restart interlock (RES) Connection 1, pin 3		
Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment Function Digital switching input 2	23 V DC 5 mA Connection 1, pin 1 Control input for start/restart interlock (RES)		
Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment Function Digital switching input 2 Assignment	23 V DC 5 mA Connection 1, pin 1 Control input for start/restart interlock (RES) Connection 1, pin 3 Control input for contactor monitoring		
Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment Function Digital switching input 2 Assignment Function	23 V DC 5 mA Connection 1, pin 1 Control input for start/restart interlock (RES) Connection 1, pin 3 Control input for contactor monitoring		

#### Outputs

Number of safety-related switching 2 Piece(s) outputs (OSSDs)

Number of digital switching outputs 1 Piece(s)

	_		Leu
The	Sensor	People	In d

	Switching voltage high, min.	18.2 V		
	Switching voltage low, max.	2.5 V		
	Switching voltage, typ.	23 V		
	Voltage type	DC		
	Current load, max.	380 mA		
	Load inductivity	2,200,000 µH		
	Load capacity	0.3 µF		
	Residual current, max.	0.2 mA		
	Residual current, typ.	0.002 mA		
	Voltage drop	1 V		
	voltage drop	I V		
	Safety-related switching o	Nutnut 1		
	Assignment	Connection 1, pin 6		
	Switching element	Transistor. PNP		
	Switching element			
	Safety-related switching o	output 2		
	Assignment	Connection 1, pin 5		
	Switching element	Transistor, PNP		
	Switching outputs			
	Туре	Digital switching output		
	Switching voltage high, min.	18.2 V		
	Switching voltage low, max.	2.5 V		
		2.5 V 23 V		
	Switching voltage, typ.	DC		
	Voltage type	DC		
	Switching output 1			
	Switching output 1 Assignment	Connection 1, pin 1		
	Switching element	Transistor, PNP		
	Function	"State of OSSDs" signal output		
	Function	State of OSSDs signal output		
Tim	ing			
_	-			
	ponse time	25 ms		
Res	tart delay time	100 ms		
_				
Cor	nnection			
Nun	nber of connections	1 Piece(s)		
С	Connection 1			
F	unction	Machine interface		
Ţ	ype of connection	Connector		
Т	hread size	M12		
N	laterial	Metal		
Ν	lo. of pins	8 -pin		
С	able properties			
	ermissible conductor cross	0.25 mm <sup>2</sup>		
S	ection, typ.			
L	ength of connection cable, max.	100 m		
Ρ	ermissible cable resistance to	200 Ω		
lo	bad, max.			

Safety-related switching outputs

Switching voltage high, min.

Туре

## **Technical data**

## Leuze

#### Mechanical data

Dimension (W x H x L)	52 mm x 600 mm x 64.7 mm
Housing material	Metal
Metal housing	Aluminum
Lens cover material	Plastic / PMMA
Material of end caps	Diecast zinc
Net weight	1,400 g
Housing color	Yellow, RAL 1021
Type of fastening	Groove mounting
	Swivel mount

#### **Operation and display**

Type of display	LED
Number of LEDs	1 Piece(s)
Environmental data	
Ambient temperature, operation	-30 55 °C
Ambient temperature, storage	-40 75 °C
Relative humidity (non-condensing)	0 95 %

Certifications	c CSA US
	c TÜV NRTL US
	TÜV Süd
US patents	US 6,418,546 B
	US 7,741,595 B
Classification	
Customs tariff number	85365019
Customs tariff number eCl@ss 5.1.4	85365019 27272703
eCl@ss 5.1.4	27272703
eCl@ss 5.1.4 eCl@ss 8.0	27272703 27272703
eCl@ss 5.1.4 eCl@ss 8.0 eCl@ss 9.0	27272703 27272703 27272703

IP 67

EC001832

EC001832

EC001832

Ш

Certifications
Degree of protection

Protection class


**ETIM 5.0** 

**ETIM 6.0** 

**ETIM 7.0** 

## **Dimensioned drawings**

All dimensions in millimeters

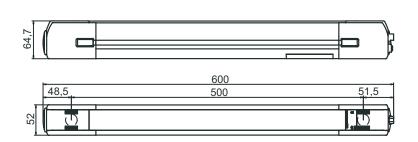

## **Electrical connection**


#### **Connection 1**

Function	Machine interface
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

### Pin Pin assignment

#### **Conductor color**

1	RES/OSSD status signal	White
2	+24V	Brown
3	EDM	Green
4	MODE	Yellow
5	OSSD2	Gray
6	OSSD1	Pink
7	0 V	Blue
8	n.c.	Red



Leuze electronic GmbH + Co. KG The Sensor People In der Braike 1, 73277 Owen

info@leuze.com • www.leuze.com Phone: +49 7021 573-0 • Fax: +49 7021 573-199

We reserve the right to make technical changes eng • 2021-01-28

## **Operation and display**

## Leuze

LED	Display	Meaning
1	Red, continuous light	OSSD off.
	Green, continuous light	OSSD on
	Red, flashing, 1 Hz	External error
	Red, flashing, 10 Hz	Internal error
	Green, flashing, 1 Hz	Weak signal, device not optimally aligned or soiled.
2	Yellow, continuous light	Start/restart interlock locked.

## Suitable transmitters

 Part no.	Designation	Article	Description
66501500	MLD500-XT2	Multiple light beam safety device transmitter	Operating range: 20 70 m Number of beams: 2 Piece(s) Beam spacing: 500 mm Connection: Connector, M12, Metal, 5 -pin

### Part number code

Part designation:	MLDxyy-zab/t
MLD	Multiple light beam safety device
x	<b>Series</b> 3: MLD 300 5: MLD 500
уу	Function classes 00: transmitter 10: automatic restart 12: external testing 20: EDM/RES 30: muting 35: timing controlled 4-sensor muting
z	Device type T: transmitter R: receiver RT: transceiver xT: transmitter with high range xR: receiver for high range
а	Number of beams
b	Option L: integrated laser alignment aid (for transmitter/receiver) M: integrated status indicator (MLD 320, MLD 520) or integrated status and muting indicator (MLD 330, MLD 335, MLD 510/A, MLD 530, MLD 535) E: connection socket for external muting indicator (AS-i models only)
/t	Safety-related switching outputs (OSSDs), connection technology -: transistor output, M12 plug A: integrated AS-i interface, M12 plug, (safety bus system)
N	ote
<b>(</b> )	A list with all available device types can be found on the Leuze website at www.leuze.com.

## Accessories



## Connection technology - Connection cables

	Part no.	Designation	Article	Description
	50135129	KD S-M12-8A-P1-100	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 10,000 mm Sheathing material: PUR
j,	50135130	KD S-M12-8A-P1-150	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 15,000 mm Sheathing material: PUR
ľ	50135131	KD S-M12-8A-P1-250	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 25,000 mm Sheathing material: PUR
	50135132	KD S-M12-8A-P1-500	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 50,000 mm Sheathing material: PUR

## Mounting technology - Swivel mounts

 Part no.	Designation	Article	Description
560340	BT-SET-240BC	Mounting bracket set	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 240° Material: Metal
540350	BT-SET-240BC-E	Mounting bracket set	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 240° Material: Metal, Plastic

### Services

	Part no.	Designation	Article	Description
$\bigcirc$	S981050	CS40-I-140	Safety inspection "Safety light barriers"	Details: Checking of a safety light barrier application in accordance with current standards and guidelines. Inclusion of the device and machine data in a database, production of a test log per application. Conditions: It must be possible to stop the machine, support provided by customer's employees and access to the machine for Leuze employees must be ensured. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.

## Accessories

## Leuze

Part no.	Designation	Article	Description
S981046	CS40-S-140	Start-up support	Details: For safety devices including stopping time measurement and initial inspection. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: Max. 2 h., no mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.

	Note
0	to A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.

 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 We reserve the right to make technical changes

 The Sensor People
 In der Braike 1, 73277 Owen
 info@leuze.com • www.leuze.com
 were electronic GmbH + Co. KG