

## **Technical data sheet Light curtain receiver** Part no.: 50119860 CML720i-R20-1590.A/CV-M12



 The Sensor People
 In der Braike 1, 73277 Owen
 Phone: +49 70

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com In der Braike 1, 73277 Owen Phone: +49 7021 573-0 • Fax: +49 7021 573-199

### **Technical data**

#### Basic data

Basic data	
Series	720
Operating principle	Throughbeam principle
Device type	Receiver
Contains	2x BT-NC sliding block
Application	Object measurement
Special version	
Special version	Crossed-beam scanning
	Diagonal-beam scanning
	Parallel-beam scanning
	r draiter beam searning
Optical data	
Operating range	Guaranteed operating range
Operating range	0.3 7 m
Operating range limit	Typical operating range
Operating range limit	0.2 9 m
Measurement field length	1,590 mm
Number of beams	80 Piece(s)
Beam spacing	20 mm
Measurement data	
Minimum object diameter	30 mm
-	
Electrical data	
Protective circuit	Polarity reversal protection
	Short circuit protected
	Transient protection
Performance data	
Supply voltage U <sub>B</sub>	18 30 V, DC
Supply voltage U <sub>B</sub> Residual ripple	0 15 %, From U <sub>B</sub>
Supply voltage U <sub>B</sub>	0 15 %, From $U_B$ 0 350 mA, The specified values refer
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current	<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 350 mA, The specified values refer to the entire package consisting of trans-</li> </ul>
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs	0 15 %, From U <sub>B</sub> 0 350 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current	<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 350 mA, The specified values refer to the entire package consisting of trans-</li> </ul>
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs	0 15 %, From U <sub>B</sub> 0 350 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs	<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 350 mA, The specified values refer to the entire package consisting of transmitter and receiver.</li> <li>2 Piece(s)</li> </ul>
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Current	<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 350 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.</li> <li>2 Piece(s)</li> <li>0 24 mA</li> </ul>
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs	<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 350 mA, The specified values refer to the entire package consisting of transmitter and receiver.</li> <li>2 Piece(s)</li> </ul>
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Current Voltage	<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 350 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.</li> <li>2 Piece(s)</li> <li>0 24 mA</li> </ul>
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Current	<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 350 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.</li> <li>2 Piece(s)</li> <li>0 24 mA</li> </ul>
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Current Voltage Analog output 1	<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 350 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.</li> <li>2 Piece(s)</li> <li>0 24 mA</li> <li>0 11 V</li> </ul>
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Current Voltage Analog output 1 Type Analog output 2	<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 350 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.</li> <li>2 Piece(s)</li> <li>0 24 mA</li> <li>0 11 V</li> <li>Voltage</li> </ul>
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Current Voltage Analog output 1 Type	<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 350 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.</li> <li>2 Piece(s)</li> <li>0 24 mA</li> <li>0 11 V</li> </ul>
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Current Voltage Analog output 1 Type Analog output 2 Type	<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 350 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.</li> <li>2 Piece(s)</li> <li>0 24 mA</li> <li>0 11 V</li> <li>Voltage</li> </ul>
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable	0 15 %, From U <sub>B</sub> 0 350 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) 0 24 mA 0 11 V Voltage Current
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max.	0 15 %, From U <sub>B</sub> 0 350 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) 0 24 mA 0 11 V Voltage Current 100 mA
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance	0 15 %, From U <sub>B</sub> 0 350 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable	0 15 %, From U <sub>B</sub> 0 350 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω 2 Piece(s)
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type	<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 350 mA, The specified values refer to the entire package consisting of transmitter and receiver.</li> <li>2 Piece(s)</li> <li>0 24 mA</li> <li>0 11 V</li> <li>Voltage</li> <li>Current</li> <li>100 mA</li> <li>6,000 Ω</li> <li>2 Piece(s)</li> <li>Inputs/outputs selectable</li> </ul>
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs	0 15 %, From U <sub>B</sub> 0 350 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC
Supply voltage U <sub>B</sub> Residual ripple         Open-circuit current         Outputs         Number of analog outputs         Current         Voltage         Analog outputs         Current         Voltage         Analog output 1         Type         Analog output 2         Type         Inputs/outputs selectable         Output current, max.         Input resistance         Number of inputs/outputs selectable         Type         Voltage type, outputs         Switching voltage, outputs	0 15 %, From $U_B$ 0 350 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) 0 24 mA 0 11 V Voltage Current 100 mA 6,000 $\Omega$ 2 Piece(s) Inputs/outputs selectable DC Typ. $U_B$ / 0 V
Supply voltage U <sub>B</sub> Residual ripple         Open-circuit current         Outputs         Number of analog outputs         Current         Voltage         Analog outputs         Current         Voltage         Analog output 1         Type         Analog output 2         Type         Inputs/outputs selectable         Output current, max.         Input resistance         Number of inputs/outputs selectable         Type         Voltage type, outputs         Switching voltage, outputs         Switching voltage, outputs         Voltage type, inputs	0 15 %, From $U_B$ 0 350 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) 0 24 mA 0 11 V Voltage Current 100 mA 6,000 $\Omega$ 2 Piece(s) Inputs/outputs selectable DC Typ. $U_B$ / 0 V DC
Supply voltage U <sub>B</sub> Residual ripple         Open-circuit current         Outputs         Number of analog outputs         Current         Voltage         Analog outputs         Current         Voltage         Analog output 1         Type         Analog output 2         Type         Inputs/outputs selectable         Output current, max.         Input resistance         Number of inputs/outputs selectable         Type         Voltage type, outputs         Switching voltage, outputs	0 15 %, From $U_B$ 0 350 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) 0 24 mA 0 11 V Voltage Current 100 mA 6,000 $\Omega$ 2 Piece(s) Inputs/outputs selectable DC Typ. $U_B$ / 0 V

Input/output 1	
Activation/disable delay	1 ms
Timing	
Readiness delay	450 ms
Cycle time	2.8 ms
Response time per beam	30 µs
Service interface	
Туре	IO-Link
IO-Link	
Function	Configuration via software
	Service
Connection	
Number of connections	2 Piece(s)
Plug outlet	Axial
Connection 1	
Function	Configuration interface
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded
0 " 0	
Connection 2	
Function	Connection to transmitter
Type of connection Thread size	Connector M12
	Female
Type	
Material	Metal
No. of pins	5 -pin
Encoding	A-coded
Mechanical data	
Design	Cubic
Dimension (W x H x L)	29 mm x 35.4 mm x 1,675 mm
Housing material	Metal
Metal housing	Aluminum
Lens cover material	Plastic
Net weight	1,750 g
Housing color	Silver
Type of fastening	Groove mounting
	Via optional mounting device
Operation and display	
Type of display	LED
-	OLED display
Number of LEDs	2 Piece(s)
Type of configuration	Software
-	Teach-in
Operational controls	Membrane keyboard
-	

Leuze

 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com

 The Sensor People
 In der Braike 1, 73277 Owen
 Phone: +49 7021 573-0 • Fax: +49

Phone: +49 7021 573-0 • Fax: +49 7021 573-199 eng • 2020-12-17

We reserve the right to make technical changes

### **Technical data**

# Leuze

#### **Environmental data**


Ambient temperature, operation	-30 60 °C	
Ambient temperature, storage	-40 70 °C	
Certifications		
Degree of protection	IP 65	
Degree of protection Protection class	IP 65 III	

#### Classification

Customs tariff number	90314990
eCl@ss 5.1.4	27270910
eCl@ss 8.0	27270910
eCl@ss 9.0	27270910
eCl@ss 10.0	27270910
eCl@ss 11.0	27270910
ETIM 5.0	EC002549
ETIM 6.0	EC002549
ETIM 7.0	EC002549

### **Dimensioned drawings**

All dimensions in millimeters

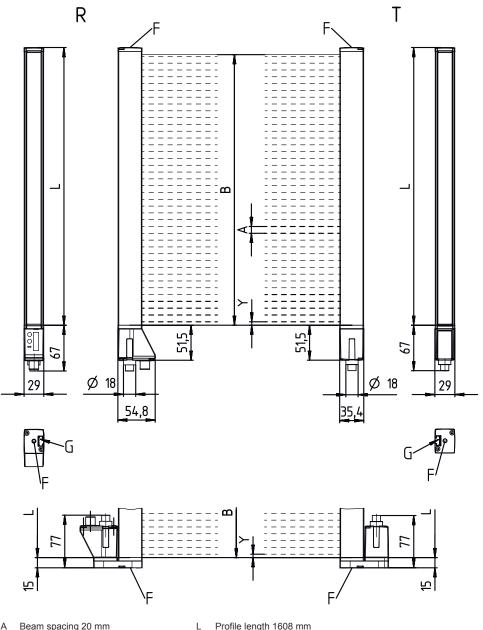

- Beam spacing 20 mm А
- В Measurement field length 1590 mm
- F M6 thread G
  - Fastening groove
- Profile length 1608 mm
- Transmitter
- R Receiver


Т

5 mm Υ



### **Dimensioned drawings**



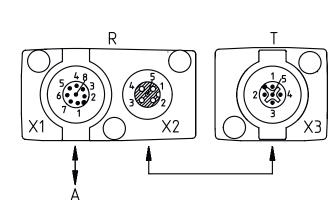

A PWR / SW IN / OUT


### **Electrical connection**

**Connection 1** 

Function	Configuration interface
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

#### Pin Pin assignment

1	V+		
2	I/O 1		
3	GND		
4	IO-Link		
5	I/O 2		
6	OUT V		
7	OUT mA		
8	AGND		




#### **Connection 2**

Function	Connection to transmitter
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

#### Pin Pin assignment

1	FE/SHIELD
2	V+
3	GND
4	RS 485 Tx+
5	RS 485 Tx-



### **Operation and display**

#### Suitable transmitters

 Part no.	Designation	Article	Description
50119432	CML720i-T20- 1590.A-M12	Light curtain transmitter	Operating range: 0.3 6 m Connection: Connector, M12, Axial, 5 -pin

#### Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

CML	Operating principle Measuring light curtain
7XXi	Series           720i: 720i series         730i: 730i series
Y	Device type T: transmitter R: receiver
22	Beam spacing 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm
AAAA	Measurement field length [mm], dependent on beam spacing
В	Equipment A: connector outlet, axial R: rear connector outlet
ccc	Interface L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus
DDD	Special equipment -PS: Power Setting
EEE	Electrical connection M12: M12 connector
FFF	-EX: Explosion protection
Note	
A list wi	th all available device types can be found on the Leuze website at www.leuze.com.

Leuze

#### Notes

#### Observe intended use!

This product is not a safety sensor and is not intended as personnel protection.

 $\ensuremath{^{\ensuremath{\Downarrow}}}$  The product may only be put into operation by competent persons.

 $\ensuremath{^{\ensuremath{\Downarrow}}}$  Only use the product in accordance with its intended use.

	For UL applications:
A	<ul> <li>For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).</li> <li>These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)</li> </ul>

#### Accessories

#### Connection technology - Connection cables

	Part no.	Designation	Article	Description
	50135128	KD S-M12-8A-P1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

#### Connection technology - Interconnection cables

	Part no.	Designation	Article	Description
	50129781	KDS DN-M12-5A- M12-5A-P3-050	Interconnection cable	Suitable for interface: IO-Link, DeviceNet, CANopen Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

#### Mounting technology - Mounting brackets

 Part no.	Designation	Article	Description
 50142900	BT 700M.5-2SET	Mounting device set	Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

#### 7/8

Leuze

#### Accessories

## Leuze

## Mounting technology - Swivel mounts

	Part no.	Designation	Article	Description
ęę.	429046	BT-2R1	Mounting bracket set	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 360° Material: Metal, Plastic

### Configuration devices

 Part no.	Designation	Article	Description
50121098	SET MD12-US2-IL1.1 + Zub.	Diagnostics set	Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20

#### Services

 Part no.	Designation	Article	Description
S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: No mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.
S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.

### Note

& A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.