


## **Technical data sheet** Light curtain receiver Part no.: 50118680 CML730i-R05-2080.A/CN-M12

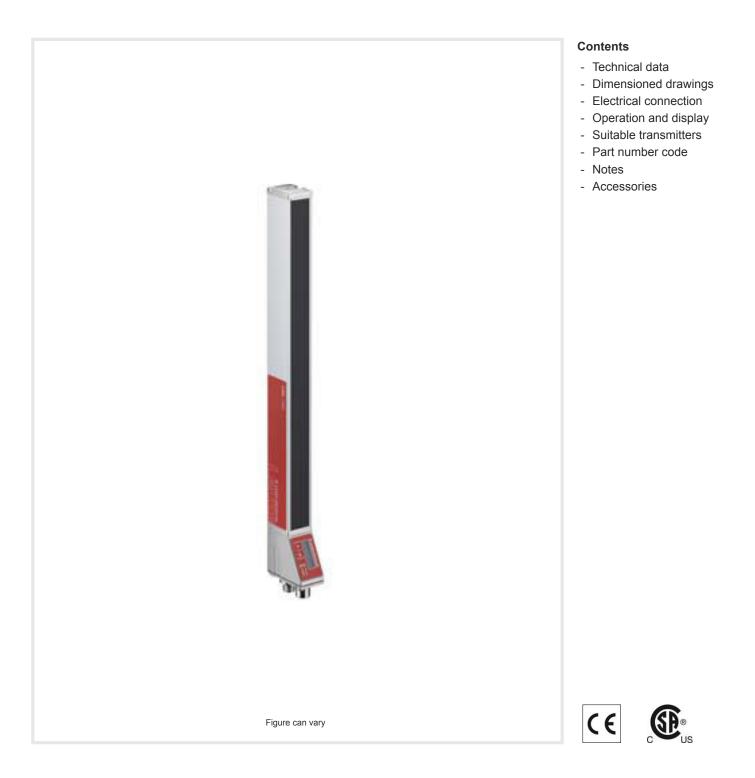

The Sensor People In der Braike 1, 73277 Owen

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com

Phone: +49 7021 573-0 • Fax: +49 7021 573-199

### **Technical data**

# Leuze

Series	730
Operating principle	Throughbeam principle
Device type	Receiver
Contains	2x BT-NC sliding block
Application	Detection of transparent objects Object measurement
Special version	
Special version	Crossed-beam scanning
	Diagonal-beam scanning
	Parallel-beam scanning
Optical data	
Operating range	Guaranteed operating range
Operating range	0.1 4.5 m
Operating range, transparent media	0.1 1.75 m
Operating range limit	Typical operating range
Operating range limit	0.1 6 m
Measurement field length	2,080 mm
Number of beams	416 Piece(s)
Beam spacing	5 mm
Measurement data	
Minimum object diameter	10 mm
Electrical data	
Protective circuit	Polarity reversal protection
	Short circuit protected
	Transient protection
Performance data	
Supply voltage U <sub>B</sub>	18 30 V, DC
Residual ripple Open-circuit current	0 15 %, From U <sub>B</sub> 0 435 mA, The specified values refer
Open-circuit current	U 400 IIIA, THE SPECIFIED VALUES FEIER
	to the entire package consisting of trans
Inputs/outputs selectable	to the entire package consisting of trans- mitter and receiver.
Output current, max.	to the entire package consisting of transmitter and receiver.
	to the entire package consisting of transmitter and receiver. 100 mA 6,000 Ω
Output current, max. Input resistance	to the entire package consisting of transmitter and receiver. 100 mA 6,000 Ω
Output current, max. Input resistance Number of inputs/outputs selectable	to the entire package consisting of trans- mitter and receiver. 100 mA 6,000 Ω 2 Piece(s)
Output current, max. Input resistance Number of inputs/outputs selectable Type	to the entire package consisting of trans- mitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs	to the entire package consisting of trans- mitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs	to the entire package consisting of transmitter and receiver. 100 mA 6,000 $\Omega$ 2 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs	to the entire package consisting of transmitter and receiver. 100 mA 6,000 $\Omega$ 2 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V DC
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs	to the entire package consisting of transmitter and receiver. 100 mA 6,000 $\Omega$ 2 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V DC high: $\geq 6V$ Iow: $\leq 4V$
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs	to the entire package consisting of trans- mitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 ∨ DC high: ≥6V
Output current, max.         Input resistance         Number of inputs/outputs selectable         Type         Voltage type, outputs         Switching voltage, outputs         Voltage type, inputs         Switching voltage, inputs         Input/output 1         Activation/disable delay	to the entire package consisting of transmitter and receiver. 100 mA 6,000 $\Omega$ 2 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V DC high: $\geq 6V$ Iow: $\leq 4V$
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1	to the entire package consisting of transmitter and receiver. 100 mA 6,000 $\Omega$ 2 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V DC high: $\geq 6V$ Iow: $\leq 4V$
Output current, max.         Input resistance         Number of inputs/outputs selectable         Type         Voltage type, outputs         Switching voltage, outputs         Voltage type, inputs         Switching voltage, inputs         Switching voltage, inputs         Input/output 1         Activation/disable delay	to the entire package consisting of trans- mitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V DC high: ≥6V Iow: ≤4V 1 ms

CANopen Function	Process
i unotion	1100033
Service interface	
Туре	IO-Link
IO-Link	
Function	Configuration via software
	Service
Connection	
Number of connections	2 Piece(s)
Plug outlet	Axial
Connection 1	
Function	Configuration interface
	Connection to transmitter
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded
Connection 2	
Function	BUS IN
- unotion	BUS OUT
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded
Mechanical data	
Design	Cubic
Dimension (W x H x L)	29 mm x 35.4 mm x 2,155 mm
Housing material	Metal
Metal housing	Aluminum
Lens cover material	Plastic
Net weight	2,200 g
Housing color	Silver
Type of fastening	Groove mounting
	Via optional mounting device
Operation and display	
Type of display	LED
	OLED display
Number of LEDs	2 Piece(s)
	Software
Type of configuration	
Type of configuration	Teach-in
Type of configuration Operational controls	Membrane keyboard
Operational controls	
Operational controls	

Туре

CANopen

### **Technical data**

## Leuze

#### Certifications


Degree of protection	IP 65
Protection class	III
Certifications	c CSA US
Standards applied	IEC 60947-5-2

#### Classification

90314990
27270910
27270910
27270910
27270910
27270910
EC002549
EC002549
EC002549

#### **Dimensioned drawings**

All dimensions in millimeters

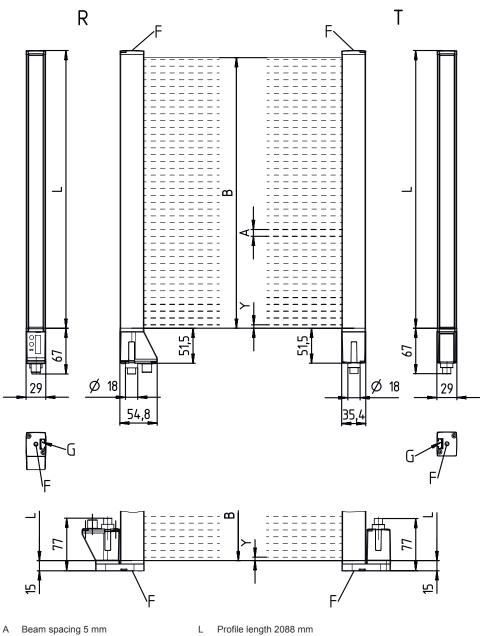

Beam spacing 5 mm А

Fastening groove

- В Measurement field length 2080 mm
- F M6 thread


G

- Transmitter Т
- R Receiver
- 2.5 mm Υ



#### **Dimensioned drawings**





A PWR / SW IN / OUTB BUS IN / OUT


## **Electrical connection**

**Connection 1** 

Function	Configuration interface
	Connection to transmitter
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

#### Pin Pin assignment

1	V+		
2	I/O 1		
3	GND		
4	IO-Link		
5	I/O 2		
6	RS 485 Tx-		
7	RS 485 Tx+		
8	FE/SHIELD		



#### **Connection 2**

Function	BUS IN
	BUS OUT
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

### **Electrical connection**

Pin	Pin assignment	
	FE/SHIELD	
	n.c.	
	CAN GND	
	CAN H	
	CAN L	

### **Operation and display**

LED	Display	Meaning
1	Green, continuous light	Operational readiness
	Green, flashing	Teach / error
2	Yellow, continuous light	Light path free, with function reserve
	Yellow, flashing	No function reserve
	Off	Object detected

#### Suitable transmitters

 Part no.	Designation	Article	Description
50118601	CML730i-T05- 2080.A-M12	Light curtain transmitter	Operating range: 0.1 4 m Connection: Connector, M12, Axial, 5 -pin

#### Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

CML	Operating principle Measuring light curtain
7XXi	Series           720i: 720i series           730i: 730i series
Y	Device type T: transmitter R: receiver
ZZ	Beam spacing           05: 5 mm           10: 10 mm           20: 20 mm           40: 40 mm
AAAA	Measurement field length [mm], dependent on beam spacing
В	Equipment A: connector outlet, axial R: rear connector outlet
ccc	Interface L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus

#### 6/9

Leuze

#### Part number code



DDD	Special equipment -PS: Power Setting
EEE	Electrical connection M12: M12 connector
FFF	-EX: Explosion protection
	Note
A	∜ A list with all available device types can be found on the Leuze website at www.leuze.com.

#### Notes

Observe intended use!
<ul> <li>This product is not a safety sensor and is not intended as personnel protection.</li> <li>The product may only be put into operation by competent persons.</li> <li>Only use the product in accordance with its intended use.</li> </ul>



#### For UL applications:

 For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).
 These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

#### Accessories

#### Connection technology - Connection cables

 Part no.	Designation	Article	Description
50132079	KD U-M12-5A-V1- 050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Open end Shielded: No Cable length: 5,000 mm Sheathing material: PVC

#### Connection technology - Interconnection cables

	Part no.	Designation	Article	Description
	50129781	KDS DN-M12-5A- M12-5A-P3-050	Interconnection cable	Suitable for interface: IO-Link, DeviceNet, CANopen Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

#### Accessories

# Leuze

## Connection technology - Y distribution cables

	Part no.	Designation	Article	Description
	50118183	K-Y1 M12A-5m- M12A-S-PUR	Interconnection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Connection 3: Connector, M12, Axial, Female, A-coded, 8 -pin Shielded: Yes Cable length fork 1: 5,000 mm Cable length fork 2: 150 mm Sheathing material: PUR
	50118185	K-YCN M12A-M12A- S-PUR	Interconnection cable	Suitable for interface: CANopen Connection 1: Connector, M12, Axial, Male, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 3: Connector, M12, Axial, Male, A-coded, 5 -pin Shielded: Yes Cable length fork 1: 250 mm Cable length fork 2: 350 mm Sheathing material: PUR

#### Connection technology - Terminating resistors

 Part no.	Designation	Article	Description
50040099	TS 01-5-SA	Terminator plug	Suitable for: DeviceNet, CANopen Connection 1: Connector, M12, Axial, Male, A-coded, 5 -pin Function: Bus termination

#### Mounting technology - Mounting brackets

 Part no.	Designation	Article	Description
 50142900	BT 700M.5-2SET	Mounting device set	Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

### Mounting technology - Swivel mounts

	Part no.	Designation	Article	Description
ęę.	429046	BT-2R1	Mounting bracket set	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 360° Material: Metal, Plastic

#### Services

 Part no.	Designation	Article	Description
S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: No mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.

#### Accessories

## Leuze

 Part no.	Designation	Article	Description
S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.

	Note
6	Note: A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.

 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 We reserve the right to make technical changes

 The Sensor People
 In der Braike 1, 73277 Owen
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 We reserve the right to make technical changes