

Technical data sheet Multiple light beam safety device

Part no.: 66568100 MLD530-RT2M



The Sensor People In der Braike 1, 73277 Owen

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com

Phone: +49 7021 573-0 • Fax: +49 7021 573-199

We reserve the right to make technical changes eng • 2021-01-28

Technical data

Leuze

Series	MLD 500
Device type	Transceiver
Special version	
Special version	Integrated muting indicator
	Integrated status indicator
Functions	
Functions	Alternative connection for second muting
l'unotions	signal
	Contactor monitoring (EDM), selectable
	Muting enable function
	Muting-timeout extension
	Partial muting
	Sequence controlled 2-sensor muting
	Start/restart interlock (RES)
	Timing controlled 2-sensor muting
	5
Characteristic parameters	
Туре	4, IEC/EN 61496
SIL	3, IEC 61508
SILCL	3, IEC/EN 62061
Performance Level (PL)	e, EN ISO 13849-1
MTTF _d	204 years, EN ISO 13849-1
PFH _D	6.6E-09 per hour
Mission time T _M	20 years, EN ISO 13849-1
Category	4, EN ISO 13849
Protective field data	
Operating range	0.5 8 m
Optical data	
Number of beams	2 Piece(s)
Beam spacing	500 mm
Light source	LED, Infrared
LED light wavelength	850 nm
Mean power of transmitter diode	1.369 µW
Transmitted-signal shape	Pulsed
LED risk group	Exempt group (in acc. with EN 62471:2008)
Electrical data	
Selection of operating mode	Connection 1, pin 2: +24 V for operating
	mode 1, 2, 4
	Connection 1, pin 2: 0 V for operating mode 3, 5, 6
	Connection 1, pin 7: 0 V for operating mode 1, 2, 4
Protective circuit	Overvoltage protection
	Short circuit protected
Deuteumen data	
Performance data	24 \/ DC 20 20 9/
Supply voltage U _B	24 V, DC, -20 20 %
Current consumption, max.	150 mA, Without external load
Fuse	External with max. 3 A
Innuts	
Inputs Number of digital switching inputs	4 Piece(s)

Switching inputs	
Туре	Digital switching input
Switching voltage high, min.	18.2 V
Switching voltage low, max.	2.5 V
Switching voltage, typ.	23 V
Voltage type	DC
Switching current, max.	5 mA
Digital switching input 1	
Assignment	Connection 1, pin 1
Function	Control input for start/restart interlock (RES)
Digital switching input 2	
Assignment	Connection 1, pin 3
Function	Control input for contactor monitoring (EDM)
Digital switching input 3	
Assignment	Connection 1, pin 4
Function	Control input, second muting signal
Digital switching input 4	
Assignment	Connection 1, pin 8
Function	Control input, muting enable/ timeout
utputs	
mber of safety-related switching tputs (OSSDs)	2 Piece(s)
mber of digital switching outputs	1 Piece(s)
Safety-related switching outp	outs
Safety-related switching outp	Safety-related switching output OSSD
Safety-related switching outp Type Switching voltage high, min.	Safety-related switching output OSSD 18.2 V
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max.	Safety-related switching output OSSD 18.2 V 2.5 V
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ.	Safety-related switching output OSSD 18.2 V 2.5 V 23 V
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type	Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max.	Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity	Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity	Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max.	Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 μH 0.3 μF 0.2 mA
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ.	Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 μH 0.3 μF 0.2 mA 0.002 mA
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max.	Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 μH 0.3 μF 0.2 mA
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ.	Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop	Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching output	Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 μH 0.3 μF 0.2 mA 0.002 mA 1 V
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching out Assignment Switching element	Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V Itput 1 Connection 1, pin 6 Transistor, PNP
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment	Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V Itput 1 Connection 1, pin 6 Transistor, PNP
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Safety-related switching ou	Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V Itput 1 Connection 1, pin 6 Transistor, PNP Itput 2
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Switching element	Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V Itput 1 Connection 1, pin 6 Transistor, PNP Itput 2 Connection 1, pin 5
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Switching element Switching element	Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V Itput 1 Connection 1, pin 6 Transistor, PNP Itput 2 Connection 1, pin 5 Transistor, PNP
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Switching element Switching element Switching element Switching outputs Type	Auts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V Mutput 1 Connection 1, pin 6 Transistor, PNP Mutput 2 Connection 1, pin 5 Transistor, PNP
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Switching element Switching element Switching outputs Type Switching voltage high, min.	Auts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V Mutput 1 Connection 1, pin 6 Transistor, PNP Mutput 2 Connection 1, pin 5 Transistor, PNP Digital switching output 18.2 V
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching outputs Switching element Switching outputs Type Switching voltage high, min. Switching voltage low, max.	A safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V Method 1 Connection 1, pin 6 Transistor, PNP Method 2 Connection 1, pin 5 Transistor, PNP Digital switching output 18.2 V 2.5 V
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching outputs Switching element Switching element Switching voltage high, min. Switching voltage low, max. Switching voltage, typ.	Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V Itput 1 Connection 1, pin 6 Transistor, PNP Itput 2 Connection 1, pin 5 Transistor, PNP Digital switching output 18.2 V 2.5 V 2.5 V 2.5 V 2.5 V 2.3 V
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching outputs Switching element Switching outputs Type Switching voltage high, min. Switching voltage low, max.	A safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V Method 1 Connection 1, pin 6 Transistor, PNP Method 2 Connection 1, pin 5 Transistor, PNP Digital switching output 18.2 V 2.5 V
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Switching element Switching outputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type	Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V Itput 1 Connection 1, pin 6 Transistor, PNP Itput 2 Connection 1, pin 5 Transistor, PNP Digital switching output 18.2 V 2.5 V 2.5 V 2.5 V 2.5 V 2.3 V
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching outputs Switching element Switching element Switching voltage high, min. Switching voltage low, max. Switching voltage, typ.	Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V Itput 1 Connection 1, pin 6 Transistor, PNP Itput 2 Connection 1, pin 5 Transistor, PNP Digital switching output 18.2 V 2.5 V 2.5 V 2.5 V 2.5 V 2.3 V
Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Switching element Switching outputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching output 1	safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V Itput 1 Connection 1, pin 6 Transistor, PNP Itput 2 Connection 1, pin 5 Transistor, PNP Digital switching output 18.2 V 2.5 V 23 V DC

 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 We reserve the rig

 The Sensor People
 In der Braike 1, 73277 Owen
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 we reserve the rig

We reserve the right to make technical changes

Technical data

Timing

inning		
Response time	50 ms	
Restart delay time	100 ms	
Connection		
Number of connections	2 Piece(s)	
Connection 1		
Function	Machine interface	
Type of connection	Connector	
Thread size	M12	
Material	Metal	
No. of pins	8 -pin	
Connection 2		
Function	Local interface	
Type of connection	Connector	
Thread size	M12	
Material	Metal	
No. of pins	5 -pin	
Cable properties		
Permissible conductor cross section, typ.	0.25 mm ²	
Length of connection cable, max.	100 m	
Permissible cable resistance to load, max.	200 Ω	
Mechanical data		
Dimension (W x H x L)	52 mm x 600 mm x 64.7 mm	
Housing material	Metal	
Metal housing	Aluminum	
Lens cover material	Plastic / PMMA	
Material of end caps	Diecast zinc	

Type of display	Integrated muting indicator
	LED
Number of LEDs	2 Piece(s)
Environmental data	
Ambient temperature, operation	-30 55 °C
Ambient temperature, storage	-40 75 °C
Relative humidity (non-condensing)	0 95 %
Certifications	
Degree of protection	IP 67
Protection class	III
Certifications	c CSA US
	c TÜV NRTL US
	TÜV Süd
US patents	US 6,418,546 B
	US 7,741,595 B
Classification	
	85365019
Customs tariff number	85365019 27272703
Customs tariff number eCl@ss 5.1.4	
Customs tariff number eCl@ss 5.1.4 eCl@ss 8.0	27272703
Customs tariff number eCl@ss 5.1.4 eCl@ss 8.0 eCl@ss 9.0	27272703 27272703
Customs tariff number eCl@ss 5.1.4 eCl@ss 8.0 eCl@ss 9.0 eCl@ss 10.0	27272703 27272703 27272703
Customs tariff number eCl@ss 5.1.4 eCl@ss 8.0 eCl@ss 9.0 eCl@ss 10.0 eCl@ss 11.0	27272703 27272703 27272703 27272703
Classification Customs tariff number eCl@ss 5.1.4 eCl@ss 8.0 eCl@ss 9.0 eCl@ss 9.0 eCl@ss 10.0 eCl@ss 11.0 ETIM 5.0 ETIM 6.0	27272703 27272703 27272703 27272703 27272703 27272703

Leuze


Dimensioned drawings

All dimensions in millimeters

Net weight

Housing color

Type of fastening

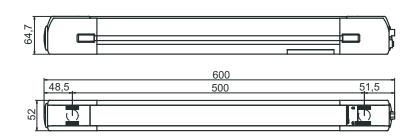

1,400 g

Yellow, RAL 1021

Groove mounting Swivel mount

Electrical connection

Leuze


Connection 1

Function	Machine interface
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

Pin Pin assignment

Conductor color

1	RES/OSSD status signal	White
2	VIN	Brown
3	EDM	Green
4	MS2	Yellow
5	OSSD2	Gray
6	OSSD1	Pink
7	VIN	Blue
8	M-EN/TO	Red



Connection 2

Function	Local interface
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

Pin	Pin assignment	Conductor color	
1	+24V	Brown	
2	MS2	White	
3	0 V	Blue	
4	MS1	Black	
5	RES/LMP	Gray	

Operation and display

LED	Display	Meaning
1	Red, continuous light	OSSD off.
	Green, continuous light	OSSD on
	Red, flashing, 1 Hz	External error
	Red, flashing, 10 Hz	Internal error
	Green, flashing, 1 Hz	Weak signal, device not optimally aligned or soiled.
2	Yellow, continuous light	Start/restart interlock locked.

4/6

Suitable deflecting mirrors



 Part no.	Designation	Article	Description
66500100	MLD-M002	Deflecting mirror	Number of beams: 2 Piece(s) Beam spacing: 500mm Type of fastening: Groove mounting, Swivel mount, Mounting on Device Column

Part number code

Part designation	
MLD	Multiple light beam safety device
x	Series 3: MLD 300 5: MLD 500
уу	Function classes 00: transmitter 10: automatic restart 12: external testing 20: EDM/RES 30: muting 35: timing controlled 4-sensor muting
Z	Device type T: transmitter R: receiver RT: transceiver xT: transmitter with high range xR: receiver for high range
а	Number of beams
b	Option L: integrated laser alignment aid (for transmitter/receiver) M: integrated status indicator (MLD 320, MLD 520) or integrated status and muting indicator (MLD 330, MLD 335, MLD 510/A, MLD 530, MLD 535) E: connection socket for external muting indicator (AS-i models only)
/t	Safety-related switching outputs (OSSDs), connection technology -: transistor output, M12 plug A: integrated AS-i interface, M12 plug, (safety bus system)
	Note
6	♦ A list with all available device types can be found on the Leuze website at www.leuze.com.

Accessories

Connection technology - Connection cables

 Part no.	Designation	Article	Description
50135128	KD S-M12-8A-P1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

Accessories



Mounting technology - Swivel mounts

 Part no.	Designation	Article	Description
560340	BT-SET-240BC	Mounting bracket set	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 240° Material: Metal
540350	BT-SET-240BC-E	Mounting bracket set	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 240° Material: Metal, Plastic

Services

Part no.	Designation	Article	Description
S981050	CS40-I-140	Safety inspection "Safety light barriers"	Details: Checking of a safety light barrier application in accordance with current standards and guidelines. Inclusion of the device and machine data in a database, production of a test log per application. Conditions: It must be possible to stop the machine, support provided by customer's employees and access to the machine for Leuze employees must be ensured. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.
S981046	CS40-S-140	Start-up support	Details: For safety devices including stopping time measurement and initial inspection. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: Max. 2 h., no mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.



the A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.