

## **Technical data sheet Light curtain receiver** Part no.: 50122891 CML720i-R05-1440.R/PB-M12



The Sensor People In der Braike 1, 73277 Owen

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com In der Braike 1, 73277 Owen Phone: +49 7021 573-0 • Fax: +49 7021 573-199

### **Technical data**

# Leuze

| Series                                       | 720   |
|--|---|
| Operating principle                          | Throughbeam principle   |
| Device type                                  | Receiver  |
| Contains                                     | Accessories for the use of the BT-2R1   |
| Application                                  | Object measurement  |
|  |   |
| Special version                              |   |
| Special version                              | Crossed-beam scanning   |
|  | Diagonal-beam scanning  |
|  | Parallel-beam scanning  |
| Optical data                                 |   |
| Operating range                              | Guaranteed operating range  |
| Operating range                              | 0.1 3.5 m   |
| Operating range limit                        | Typical operating range   |
| Operating range limit                        | 0.1 4.5 m   |
| Measurement field length                     | 1,440 mm  |
| Number of beams                              | 288 Piece(s)  |
| Beam spacing                                 | 5 mm  |
|  |   |
| Measurement data                             |   |
| Minimum object diameter                      | 10 mm   |
| Electrical data                              |   |
| Protective circuit                           | Polarity reversal protection  |
|  | Short circuit protected   |
|  | Transient protection  |
| _  |   |
| Performance data                             |   |
| Supply voltage U <sub>B</sub>                | 18 30 V, DC   |
| Residual ripple                              | 0 15 %, From U <sub>B</sub>   |
| Open-circuit current                         | 0 350 mA, The specified values refer<br>to the entire package consisting of trans<br>mitter and receiver. |
|  |   |
| Inputs/outputs selectable                    | 100 m 4   |
| Output current, max.<br>Input resistance     | 100 mA<br>6.000 Ω   |
| Number of inputs/outputs selectable          | - )   |
| Type   | Inputs/outputs selectable   |
| Voltage type, outputs                        | DC  |
| Switching voltage, outputs                   | Typ. U <sub>B</sub> / 0 V   |
| Voltage type, inputs                         | DC  |
| Switching voltage, inputs                    | bc<br>high: ≥6V   |
| Curroning voltage, inputs                    | low: ≤4V  |
|  | T V   |
| Input/output 1                               |   |
| Activation/disable delay                     | 1 ms  |
| Timing                                       |   |
| -  | 0.04 mc   |
| Cycle time<br>Response time per beam         | 9.04 ms   |
| Response time per beam                       | 30 µs   |
| -  |   |
|  |   |
| Interface                                    | PROFIBUS DP   |
| Interface<br>Type                            | PROFIBUS DP   |
| Interface<br>Type<br>PROFIBUS DP<br>Function | PROFIBUS DP<br>Process  |

| ink<br>figuration via software<br>vice<br>ece(s)<br>ar side<br>figuration interface<br>nection to transmitter<br>hal IN<br>hal OUT<br>age supply<br>inector<br>2<br>e<br>al<br>in<br>boded   |
|--|
| ece(s)<br>ir side<br>figuration interface<br>inection to transmitter<br>hal IN<br>hal OUT<br>age supply<br>inector<br>2<br>e<br>al<br>in   |
| ece(s)<br>ir side<br>figuration interface<br>inection to transmitter<br>hal IN<br>hal OUT<br>age supply<br>inector<br>2<br>e<br>al<br>in   |
| ece(s)<br>In side<br>initial of the formation interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>Interface<br>In |
| r side<br>figuration interface<br>anection to transmitter<br>hal IN<br>hal OUT<br>age supply<br>age su                               |
| r side<br>figuration interface<br>anection to transmitter<br>hal IN<br>hal OUT<br>age supply<br>inector<br>2<br>e<br>al<br>in  |
| r side<br>figuration interface<br>anection to transmitter<br>hal IN<br>hal OUT<br>age supply<br>age su                               |
| nal IN<br>nal OUT<br>age supply<br>inector<br>2<br>e<br>al   |
| nal IN<br>nal OUT<br>age supply<br>inector<br>2<br>e<br>al   |
| nection to transmitter<br>nal IN<br>nal OUT<br>age supply<br>unector<br>2<br>e<br>al<br>al   |
| nal IN<br>nal OUT<br>age supply<br>inector<br>2<br>e<br>al<br>al   |
| nal OUT<br>age supply<br>inector<br>2<br>e<br>al<br>al   |
| age supply<br>inector<br>2<br>e<br>al<br>in  |
| nector<br>2<br>e<br>al   |
| 2<br>e<br>al   |
| -<br>e<br>al<br>in   |
| al   |
| in   |
|  |
|  |
|  |
|  |
| 3 IN   |
| SOUT   |
| inector  |
| 2  |
| nale   |
| al   |
| in   |
| oded   |
|  |
| ic   |
| nm x 35.4 mm x 1,463 mm  |
| al   |
| ninum  |
| stic<br>50 g   |
| er   |
| ove mounting   |
| optional mounting device   |
|  |
| )  |
| ED display   |
| ece(s)   |
| ware   |
| ch-in  |
|  |
| GIFILI   |
| 60 °C  |
|  |
|  |

## **Technical data**

# Leuze

#### Certifications


| SAUS      |
|-----------|
| 60947-5-2 |
|           |

#### Classification

| Customs tariff number                          | 90314990                                     |
|--|--|
| eCl@ss 5.1.4                                   | 27270910                                     |
| eCl@ss 8.0                                     | 27270910                                     |
| eCl@ss 9.0                                     | 27270910                                     |
| eCl@ss 10.0                                    | 27270910                                     |
| eCl@ss 11.0                                    | 27270910                                     |
| ETIM 5.0                                       | EC002549                                     |
| ETIM 6.0                                       | EC002549                                     |
| ETIM 7.0                                       | EC002549                                     |
| Cl@ss 10.0<br>Cl@ss 11.0<br>FIM 5.0<br>FIM 6.0 | 27270910<br>27270910<br>EC002549<br>EC002549 |

#### **Dimensioned drawings**

All dimensions in millimeters

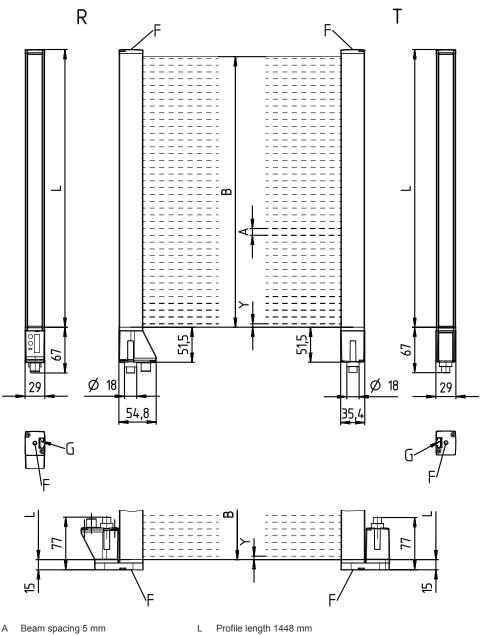

Beam spacing 5 mm А

Fastening groove

- В Measurement field length 1440 mm
- F M6 thread

G


- R Receiver
  - 2.5 mm Υ

Т

Transmitter

#### **Dimensioned drawings**



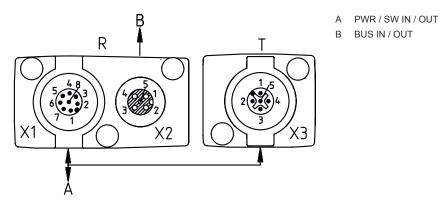

## **Electrical connection**

**Connection 1** 


| Function           | Configuration interface   |
|--------------------|---------------------------|
|                    | Connection to transmitter |
|                    | Signal IN                 |
|                    | Signal OUT                |
|                    | Voltage supply            |
| Type of connection | Connector                 |
| Thread size        | M12                       |
| Туре               | Male                      |
| Material           | Metal                     |
| No. of pins        | 8 -pin                    |
| Encoding           | A-coded                   |
|                    |                           |

#### Pin Pin assignment

| 1 | V+         |  |  |
|---|------------|--|--|
| 2 | I/O 1      |  |  |
| 3 | GND        |  |  |
| 4 | IO-Link    |  |  |
| 5 | I/O 2      |  |  |
| 6 | RS 485 Tx+ |  |  |
| 7 | RS 485 Tx+ |  |  |
| 8 | FE/SHIELD  |  |  |
|   |            |  |  |



| Function           | BUS IN    |
|--------------------|-----------|
|                    | BUS OUT   |
| Type of connection | Connector |
| Thread size        | M12       |
| Туре               | Female    |
| Material           | Metal     |
| No. of pins        | 5 -pin    |
| Encoding           | B-coded   |



## **Electrical connection**

# PinPin assignment1V+2Tx-3PB GND4Tx+5FE/SHIELD



| LED | Display                  | Meaning                                |
|-----|--------------------------|--|
| 1   | Green, continuous light  | Operational readiness                  |
|     | Green, flashing          | Teach / error                          |
| 2   | Yellow, continuous light | Light path free, with function reserve |
|     | Yellow, flashing         | No function reserve                    |
|     | Off                      | Object detected                        |

#### Suitable transmitters

| <br>Part no. | Designation                | Article                      | Description   |
|--------------|----------------------------|------------------------------|---|
| 50119466     | CML720i-T05-<br>1440.R-M12 | Light curtain<br>transmitter | Operating range: 0.1 3.5 m<br>Connection: Connector, M12, Rear side, 5 -pin |

#### Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

| CML  | Operating principle<br>Measuring light curtain  |
|------|---|
| 7XXi | Series           720i: 720i series           730i: 730i series  |
| Y    | Device type<br>T: transmitter<br>R: receiver  |
| 22   | Beam spacing<br>05: 5 mm<br>10: 10 mm<br>20: 20 mm<br>40: 40 mm   |
| AAAA | Measurement field length [mm], dependent on beam spacing  |
| В    | Equipment<br>A: connector outlet, axial<br>R: rear connector outlet   |
| ccc  | Interface<br>L: IO-Link<br>/CN: CANopen<br>/PB: PROFIBUS<br>/PN: PROFINET<br>/CV: Analog current and voltage output<br>/D3: RS 485 Modbus |



Leuze

#### Part number code



7/9

| DDD | Special equipment<br>-PS: Power Setting  |
|-----|--|
| EEE | Electrical connection<br>M12: M12 connector  |
| FFF | -EX: Explosion protection  |
|     | Note   |
|     |  |
| A   | ✤ A list with all available device types can be found on the Leuze website at www.leuze.com. |

#### Notes

| Observe intended use!   |
|---|
| <ul> <li>This product is not a safety sensor and is not intended as personnel protection.</li> <li>The product may only be put into operation by competent persons.</li> <li>Only use the product in accordance with its intended use.</li> </ul> |



#### For UL applications:

 For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).
 These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

#### Accessories

#### Connection technology - Connection cables

| <br>Part no. | Designation            | Article          | Description   |
|--------------|------------------------|------------------|---|
| 50132079     | KD U-M12-5A-V1-<br>050 | Connection cable | Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 5,000 mm<br>Sheathing material: PVC |

#### Connection technology - Y distribution cables

|  | Part no. | Designation                 | Article               | Description  |
|--|----------|-----------------------------|-----------------------|--|
|  | 50118183 | K-Y1 M12A-5m-<br>M12A-S-PUR | Interconnection cable | Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin<br>Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin<br>Connection 3: Connector, M12, Axial, Female, A-coded, 8 -pin<br>Shielded: Yes<br>Cable length fork 1: 5,000 mm<br>Cable length fork 2: 150 mm<br>Sheathing material: PUR |

#### Accessories

# Leuze

|  | Part no. | Designation                  | Article               | Description   |
|--|----------|------------------------------|-----------------------|---|
|  | 50123265 | K-YPB M12A-5m-<br>M12A-S-PUR | Interconnection cable | Suitable for interface: PROFIBUS DP<br>Connection 1: Connector, M12, Axial, Male, B-coded, 5 -pin<br>Connection 2: Cable with connector, M12, Axial, Female, B-coded, 5 -pin<br>Connection 3: Cable with connector, M12, Axial, Male, B-coded, 5 -pin<br>Shielded: Yes<br>Sheathing material: PUR |

#### Mounting technology - Mounting brackets

|          | Part no. | Designation    | Article             | Description   |
|----------|----------|----------------|---------------------|---|
| 1.1. 1.1 | 50142900 | BT 700M.5-2SET | Mounting device set | Design of mounting device: Bracket mounting<br>Fastening, at system: Through-hole mounting, T slotted hole<br>Mounting bracket, at device: Screw type, Sliding block<br>Type of mounting device: Rigid<br>Material: Steel |

#### Mounting technology - Swivel mounts

|     | Part no. | Designation | Article              | Description   |
|-----|----------|-------------|----------------------|---|
| ęę. | 429046   | BT-2R1      | Mounting bracket set | Fastening, at system: Through-hole mounting<br>Mounting bracket, at device: Clampable<br>Type of mounting device: Turning, 360°<br>Material: Metal, Plastic |

## Configuration devices

|     | Part no. | Designation                  | Article         | Description  |
|-----|----------|------------------------------|-----------------|--|
| 165 | 50121098 | SET MD12-US2-IL1.1<br>+ Zub. | Diagnostics set | Interface: USB<br>Connections: 2 Piece(s)<br>Degree of protection: IP 20 |

#### Services

| <br>Part no. | Designation | Article          | Description   |
|--------------|-------------|------------------|---|
| S981001      | CS10-S-110  | Start-up support | Details: Performed at location of customer's choosing, duration: max. 10<br>hours.<br>Conditions: Devices and connection cables are already mounted, price not<br>including travel costs and, if applicable, accommodation expenses.<br>Restrictions: No mechanical (mounting) and electrical (wiring) work<br>performed, no changes (attachments, wiring, programming) to third-party<br>components in the nearby environment. |
| S981005      | CS10-T-110  | Product training | Details: Location and content to be agreed upon, duration: max. 10 hours.<br>Conditions: Price not including travel costs and, if applicable, accommodation<br>expenses.<br>Restrictions: Travel costs and accommodation expenses charged separately<br>and according to expenditure.   |

#### Accessories





♦ A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.