

# **Technical data sheet** Multiple light beam safety device receiver Part no.: 66553100

MLD520-R2



The Sensor People In der Braike 1, 73277 Owen

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com

Phone: +49 7021 573-0 • Fax: +49 7021 573-199

# **Technical data**

# Leuze

Safety-related switching output OSSD

18.2 V

2.5 V

23 V

DC

380 mA

0.3 µF

0.2 mA

1 V

0.002 mA

Connection 1, pin 6

Connection 1, pin 5

Digital switching output

Connection 1, pin 1

"State of OSSDs" signal output

Transistor, PNP

Transistor, PNP

18.2 V

2.5 V

23 V

DC

25 ms

100 ms

1 Piece(s)

Connector

M12

Metal

8 -pin

0.25 mm<sup>2</sup>

100 m

200 Ω

Machine interface

Transistor, PNP

2,200,000 µH

Safety-related switching outputs

Safety-related switching output 1

Safety-related switching output 2

Switching voltage high, min.

Switching voltage low, max. Switching voltage, typ.

Residual current, max.

Residual current, typ.

Switching element

Switching element

Switching voltage high, min.

Switching voltage low, max.

Switching output 1

Switching voltage, typ.

Assignment Switching element

Cable properties Permissible conductor cross

Length of connection cable, max.

Permissible cable resistance to

Switching outputs

		Safety-related sw Type
Series	MLD 500	Switching voltage h
Device type	Receiver	Switching voltage lo
Functions		Switching voltage, t
i uncuona		Voltage type
Functions	Contactor monitoring (EDM), selectable	Current load, max.
	Start/restart interlock (RES), selectable	Load inductivity
Change to vistig a superstand		Load capacity
Characteristic parameters		Residual current, m
Туре	4, IEC/EN 61496	Residual current, ty
SIL	3, IEC 61508	Voltage drop
SILCL	3, IEC/EN 62061	
Performance Level (PL)	e, EN ISO 13849-1	Safety-related
MTTF <sub>d</sub>	204 years, EN ISO 13849-1	Assignment
PFH <sub>D</sub>	6.6E-09 per hour	Switching element
Mission time T <sub>M</sub>	20 years, EN ISO 13849-1	
Category	4, EN ISO 13849	Safety-related
		Assignment
Optical data		Switching element
Number of beams	2 Piece(s)	Switching output
Beam spacing	500 mm	Switching output Type
		Switching voltage h
Electrical data		Switching voltage lo
Protective circuit	Overvoltage protection	Switching voltage, t
	Short circuit protected	Voltage type
		voltage type
Performance data		Switching outp
Supply voltage U <sub>B</sub>	24 V, DC, -20 20 %	Assignment
Current consumption, max.	150 mA, Without external load	Switching element
Fuse	External with max. 3 A	
ruse	External with max. on	Function
1 436	External with max. or r	Function
Inputs		Function
	3 Piece(s)	Timing
Inputs Number of digital switching inputs		Timing Response time
Inputs Number of digital switching inputs Switching inputs	3 Piece(s)	Timing
Inputs Number of digital switching inputs Switching inputs Type	3 Piece(s) Digital switching input	Timing Response time
Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min.	3 Piece(s) Digital switching input 18.2 V	Timing Response time Restart delay time Connection
Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max.	3 Piece(s) Digital switching input 18.2 V 2.5 V	Timing Response time Restart delay time
Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ.	3 Piece(s) Digital switching input 18.2 V 2.5 V 23 V	Timing Response time Restart delay time Connection Number of connections
Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type	3 Piece(s) Digital switching input 18.2 V 2.5 V 23 V DC	Timing Response time Restart delay time Connection Number of connections Connection 1
Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ.	3 Piece(s) Digital switching input 18.2 V 2.5 V 23 V	Timing Response time Restart delay time Connection Number of connections Connection 1 Function
Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max.	3 Piece(s) Digital switching input 18.2 V 2.5 V 23 V DC	Timing Response time Restart delay time Connection Number of connections Connection 1 Function Type of connection
Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1	3 Piece(s) Digital switching input 18.2 V 2.5 V 23 V DC 5 mA	Timing Response time Restart delay time Connection Number of connections Connection 1 Function Type of connection Thread size
Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment	3 Piece(s) Digital switching input 18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 1	Timing Response time Restart delay time Connection Number of connections Connection 1 Function Type of connection Thread size Material
Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1	3 Piece(s) Digital switching input 18.2 V 2.5 V 23 V DC 5 mA	Timing Response time Restart delay time Connection Number of connections Connection 1 Function Type of connection Thread size
Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment	3 Piece(s) Digital switching input 18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 1 Control input for start/restart interlock	Timing Response time Restart delay time Connection Number of connections Connection 1 Function Type of connection Thread size Material No. of pins
Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment	3 Piece(s) Digital switching input 18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 1 Control input for start/restart interlock	Timing Response time Restart delay time Connection Number of connections Connection 1 Function Type of connection Thread size Material
Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment Function	3 Piece(s) Digital switching input 18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 1 Control input for start/restart interlock	Timing Response time Restart delay time Connection Number of connections Connection 1 Function Type of connection Thread size Material No. of pins Cable properties
Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment Function Digital switching input 2	3 Piece(s) Digital switching input 18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 1 Control input for start/restart interlock (RES) Connection 1, pin 3 Control input for contactor monitoring	Timing Response time Restart delay time Connection Number of connections Connection 1 Function Type of connection Thread size Material No. of pins Cable properties Permissible conducto
Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment Function Digital switching input 2 Assignment	3 Piece(s) Digital switching input 18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 1 Control input for start/restart interlock (RES) Connection 1, pin 3	TimingResponse timeRestart delay timeConnectionNumber of connectionsConnection 1FunctionType of connectionThread sizeMaterialNo. of pinsCable propertiesPermissible conductosection, typ.Length of connectionPermissible cable resi
Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment Function Digital switching input 2 Assignment Function	3 Piece(s) Digital switching input 18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 1 Control input for start/restart interlock (RES) Connection 1, pin 3 Control input for contactor monitoring	TimingResponse timeRestart delay timeConnectionNumber of connectionsConnection 1FunctionType of connectionThread sizeMaterialNo. of pinsCable propertiesPermissible conductosection, typ.Length of connection
InputsNumber of digital switching inputsSwitching inputsTypeSwitching voltage high, min.Switching voltage low, max.Switching voltage, typ.Voltage typeSwitching current, max.Digital switching input 1AssignmentFunctionDigital switching input 2AssignmentFunctionDigital switching input 2AssignmentFunctionDigital switching input 3	3 Piece(s) Digital switching input 18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 1 Control input for start/restart interlock (RES) Connection 1, pin 3 Control input for contactor monitoring (EDM)	TimingResponse timeRestart delay timeConnectionNumber of connectionsConnection 1FunctionType of connectionThread sizeMaterialNo. of pinsCable propertiesPermissible conductosection, typ.Length of connectionPermissible cable resi
Inputs Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment Function Digital switching input 2 Assignment Function	3 Piece(s) Digital switching input 18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 1 Control input for start/restart interlock (RES) Connection 1, pin 3 Control input for contactor monitoring	TimingResponse timeRestart delay timeConnectionNumber of connectionsConnection 1FunctionType of connectionThread sizeMaterialNo. of pinsCable propertiesPermissible conductosection, typ.Length of connectionPermissible cable resi

#### Outputs

Number of safety-related switching 2 Piece(s) outputs (OSSDs)

Number of digital switching outputs 1 Piece(s)



2/6

# **Technical data**

# Leuze

#### Mechanical data

Dimension (W x H x L)	52 mm x 600 mm x 64.7 mm
Housing material	Metal
Metal housing	Aluminum
Lens cover material	Plastic / PMMA
Material of end caps	Diecast zinc
Net weight	1,400 g
Housing color	Yellow, RAL 1021
Type of fastening	Groove mounting
	Swivel mount

#### **Operation and display**

Type of display	LED
Number of LEDs	1 Piece(s)
Environmental data	
Ambient temperature, operation	-30 55 °C
Ambient temperature, storage	-40 75 °C
Relative humidity (non-condensing)	0 95 %

Degree of protection	IP 67	
Protection class	III	
Certifications	c CSA US	
	c TÜV NRTL US	
	TÜV Süd	
US patents	US 6,418,546 B	
	US 7,741,595 B	
	001,111,000 B	
Classification	001,11,0001	
Classification Customs tariff number	85365019	
Customs tariff number	85365019	
Customs tariff number eCl@ss 5.1.4	85365019 27272703	_
Customs tariff number eCl@ss 5.1.4 eCl@ss 8.0	85365019 27272703 27272703	
Customs tariff number eCl@ss 5.1.4 eCl@ss 8.0 eCl@ss 9.0	85365019 27272703 27272703 27272703	

EC001832


EC001832

Certifications

**ETIM 6.0 ETIM 7.0** 

### **Dimensioned drawings**

All dimensions in millimeters

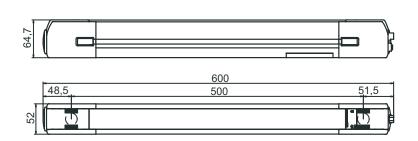

# **Electrical connection**


#### **Connection 1**

Function	Machine interface
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

#### Pin Pin assignment

#### **Conductor color**

1	RES/OSSD status signal	White	
2	+24V	Brown	
3	EDM	Green	
4	MODE	Yellow	
5	OSSD2	Gray	
6	OSSD1	Pink	
7	0 V	Blue	
8	n.c.	Red	



The Sensor People In der Braike 1, 73277 Owen

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com

Phone: +49 7021 573-0 • Fax: +49 7021 573-199

## **Operation and display**

# Leuze

LED	Display	Meaning
1	Red, continuous light	OSSD off.
	Green, continuous light	OSSD on
	Red, flashing, 1 Hz	External error
	Red, flashing, 10 Hz	Internal error
	Green, flashing, 1 Hz	Weak signal, device not optimally aligned or soiled.
2	Yellow, continuous light	Start/restart interlock locked.

## Suitable transmitters

 Part no.	Designation	Article	Description
66501100	MLD500-T2	Multiple light beam safety device transmitter	Operating range: 0.5 50 m Number of beams: 2 Piece(s) Beam spacing: 500 mm Connection: Connector, M12, Metal, 5 -pin

### Part number code

Part designation:	MLDxyy-zab/t
MLD	Multiple light beam safety device
x	Series 3: MLD 300 5: MLD 500
уу	Function classes 00: transmitter 10: automatic restart 12: external testing 20: EDM/RES 30: muting 35: timing controlled 4-sensor muting
z	Device type T: transmitter R: receiver RT: transceiver xT: transmitter with high range xR: receiver for high range
а	Number of beams
b	Option L: integrated laser alignment aid (for transmitter/receiver) M: integrated status indicator (MLD 320, MLD 520) or integrated status and muting indicator (MLD 330, MLD 335, MLD 510/A, MLD 530, MLD 535) E: connection socket for external muting indicator (AS-i models only)
/t	Safety-related switching outputs (OSSDs), connection technology -: transistor output, M12 plug A: integrated AS-i interface, M12 plug, (safety bus system)
N	lote
<b>f</b>	A list with all available device types can be found on the Leuze website at www.leuze.com.

### Accessories



# Connection technology - Connection cables

	Part no.	Designation	Article	Description
ľ	50135129	KD S-M12-8A-P1-100	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 10,000 mm Sheathing material: PUR
IJ	50135130	KD S-M12-8A-P1-150	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 15,000 mm Sheathing material: PUR
Ú	50135131	KD S-M12-8A-P1-250	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 25,000 mm Sheathing material: PUR
	50135132	KD S-M12-8A-P1-500	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 50,000 mm Sheathing material: PUR

## Mounting technology - Swivel mounts

 Part no.	Designation	Article	Description
560340	BT-SET-240BC	Mounting bracket set	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 240° Material: Metal
540350	BT-SET-240BC-E	Mounting bracket set	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 240° Material: Metal, Plastic

### Services

 Part no.	Designation	Article	Description
S981050	CS40-I-140	Safety inspection "Safety light barriers"	Details: Checking of a safety light barrier application in accordance with current standards and guidelines. Inclusion of the device and machine data in a database, production of a test log per application. Conditions: It must be possible to stop the machine, support provided by customer's employees and access to the machine for Leuze employees must be ensured. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.

## Accessories

# Leuze

 Part no.	Designation	Article	Description
S981046	CS40-S-140	Start-up support	Details: For safety devices including stopping time measurement and initial inspection. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: Max. 2 h., no mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.

	Note
0	<sup>t</sup> A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.

 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 We reserve the right to make technical changes

 The Sensor People
 In der Braike 1, 73277 Owen
 info@leuze.com • www.leuze.com
 were electronic GmbH + Co. KG