

Technical data sheet Light curtain receiver Part no.: 50131683 CML730i-R05-1120.R/PN-M12

The Sensor People In der Braike 1, 73277 Owen



Phone: +49 7021 573-0 • Fax: +49 7021 573-199

1/9

We reserve the right to make technical changes

eng • 2020-12-24

Technical data

Leuze

Series	730
Operating principle	Throughbeam principle
Device type	Receiver
Contains	Accessories for the use of the BT-2R1
Application	Detection of transparent objects
	Object measurement
Special version	
Special version	Crossed-beam scanning
	Diagonal-beam scanning
	Parallel-beam scanning
Optical data	
	Cuerenteed exercting range
Operating range	Guaranteed operating range 0.1 4.5 m
Operating range Operating range, transparent media	0.1 1.75 m
Operating range, transparent media Operating range limit	Typical operating range
Operating range limit	0.1 6 m
Measurement field length	1.120 mm
Number of beams	224 Piece(s)
Beam spacing	5 mm
Measurement data	
Minimum object diameter	10 mm
Electrical data	
Protective circuit	Polarity reversal protection
	Short circuit protected
	Transient protection
Porformanaa data	
Performance data	18 30 V DC
Supply voltage U _B	18 30 V, DC
Supply voltage U _B Residual ripple	0 15 %, From U _B
Supply voltage U _B	0 15 %, From $\rm U_B$ 0 270 mA, The specified values refer
Supply voltage U _B Residual ripple Open-circuit current	0 15 %, From U _B 0 270 mA, The specified values refer to the entire package consisting of trans
Supply voltage U _B Residual ripple Open-circuit current Inputs/outputs selectable	0 15 %, From U _B 0 270 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.
Supply voltage U _B Residual ripple Open-circuit current Inputs/outputs selectable Output current, max.	0 15 %, From U _B 0 270 mA, The specified values refer to the entire package consisting of trans mitter and receiver.
Supply voltage U _B Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance	 0 15 %, From U_B 0 270 mA, The specified values refer to the entire package consisting of trans mitter and receiver. 100 mA 6,000 Ω
Supply voltage U _B Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable	 0 15 %, From U_B 0 270 mA, The specified values refer to the entire package consisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s)
Supply voltage U _B Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type	 0 15 %, From U_B 0 270 mA, The specified values refer to the entire package consisting of trans mitter and receiver. 100 mA 6,000 Ω
Supply voltage U _B Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs	 0 15 %, From U_B 0 270 mA, The specified values refer to the entire package consisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC
Supply voltage U _B Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type	 0 15 %, From U_B 0 270 mA, The specified values refer to the entire package consisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable
Supply voltage U _B Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs	0 15 %, From U_B 0 270 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. $U_B / 0 V$
Supply voltage U _B Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs	0 15 %, From U_B 0 270 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U_B / 0 V DC
Supply voltage U _B Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs	0 15 %, From U _B 0 270 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: ≥6V
Supply voltage U _B Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1	0 15 %, From U_B 0 270 mA, The specified values refer to the entire package consisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. $U_B / 0 V$ DC high: ≥6V Iow: ≤4V
Supply voltage U _B Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs	0 15 %, From U_B 0 270 mA, The specified values refer to the entire package consisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. $U_B / 0 V$ DC high: $\geq 6V$
Supply voltage U _B Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1	0 15 %, From U _B 0 270 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: ≥6V Iow: ≤4V
Supply voltage U _B Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Switching voltage, inputs	0 15 %, From U _B 0 270 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: ≥6V Iow: ≤4V
Supply voltage U _B Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Switching voltage, inputs Input/output 1 Activation/disable delay Timing	0 15 %, From U_B 0 270 mA, The specified values refer to the entire package consisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. $U_B / 0 \vee$ DC high: ≥6V Iow: ≤4V 1 ms

Interface

Туре

PROFINET

Profinet	
Function	Process
Conformance class	В
Protocol	PROFINET RT
Switch functionality	Integrated
Transmission speed	10 Mbit/s
	100 Mbit/s
Service interface	
	IO-Link
Туре	10-LIIK
IO-Link	
Function	Configuration via software
	Service
Connection	
Number of connections	
	3 Piece(s) Rear side
Plug outlet	Rear side
Connection 1	
Function	Configuration interface
	Connection to transmitter
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded
Literating	
Connection 2	
Function	BUS IN
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	4 -pin
Encoding	D-coded
Connection 3	
Function	BUS OUT
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	4 -pin
Encoding	D-coded
Mechanical data	
Design	Cubic
Dimension (W x H x L)	29 mm x 35.4 mm x 1,143 mm
Housing material	Metal
Metal housing	Aluminum
Lens cover material	Plastic
Net weight	1,350 g
Housing color	Silver
Type of fastening	Groove mounting
	Via optional mounting device

Technical data

Leuze

Operation and display

Type of display	LED
	OLED display
Number of LEDs	4 Piece(s)
Type of configuration	Software
	Teach-in
Operational controls	Membrane keyboard
Environmental data	
Ambient temperature, operation	-30 60 °C

Ambient temperature, operation Ambient temperature, storage

Certifications

Degree of protection	IP 65
Protection class	III
Certifications	c CSA US
Standards applied	IEC 60947-5-2


-40 ... 70 °C

Classification

Customs tariff number	90314990
eCl@ss 5.1.4	27270910
eCl@ss 8.0	27270910
eCl@ss 9.0	27270910
eCl@ss 10.0	27270910
eCl@ss 11.0	27270910
ETIM 5.0	EC002549
ETIM 6.0	EC002549
ETIM 7.0	EC002549

Dimensioned drawings

All dimensions in millimeters

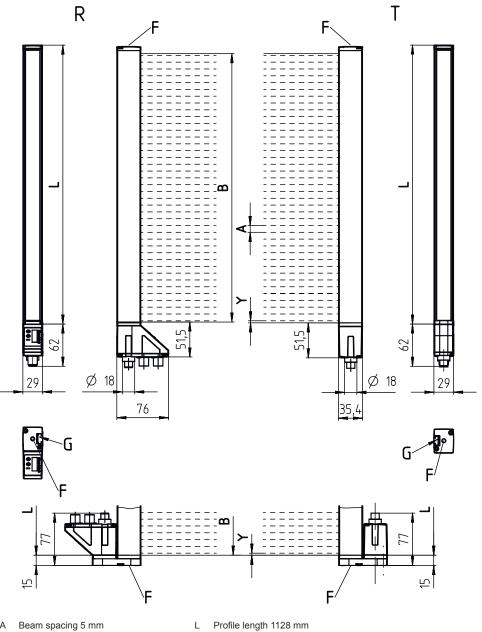


- А
- В Measurement field length 1120 mm
- F M6 thread G
 - Fastening groove
- Т
 - Transmitter
- R Receiver
- Υ 2.5 mm



We reserve the right to make technical changes eng • 2020-12-24

Leuze

Dimensioned drawings




- A PWR / SW IN / OUT B BUS IN
- C BUS OUT

Electrical connection

Connection 1	X1
Function	Configuration interface
	Connection to transmitter
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

Pin Pin assignment


1	V+		
2	I/O 1		
3	GND		
4	IO-Link		
5	I/O 2		
6	RS 485 Tx+		
7	RS 485 Tx+		
8	FE/SHIELD		



Connection 2	X2A
Function	BUS IN
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	4 -pin
Encoding	D-coded

Pin Pin assignment

1	TD0+
2	RD0+
3	TD0-
4	RD0-




Electrical connection

Connection 3

Function	BUS OUT
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	4 -pin
Encoding	D-coded

X2B

Pin	Pin assignment	
1	TD0+	
2	RD0+	
3	TD0-	
4	RD0-	



Operation and display

LED	Display	Meaning
1	Green, continuous light	Operational readiness
	Green, flashing	Teach / error
2	Yellow, continuous light	Light path free, with function reserve
	Yellow, flashing	No function reserve
	Off	Object detected
3	Green, continuous light (at the X2A / X2B connector)	Link
4	Yellow, continuous light (at the X2A / X2B connector)	Activity

Suitable transmitters

 Part no.	Designation	Article	Description
50118925	CML730i-T05- 1120.R-M12	Light curtain transmitter	Operating range: 0.1 4 m Connection: Connector, M12, Rear side, 5 -pin

Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

CML	Operating principle Measuring light curtain					
7XXi	Series 720i: 720i series 730i: 730i series					
Y	Device type T: transmitter R: receiver					
22	Beam spacing 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm					
AAAA	Measurement field length [mm], dependent on beam spacing					
В	Equipment A: connector outlet, axial R: rear connector outlet					



Part number code



CCC	Interface L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET
	/CV: Analog current and voltage output /D3: RS 485 Modbus
DDD	Special equipment -PS: Power Setting
EEE	Electrical connection M12: M12 connector
FFF	-EX: Explosion protection
Note	
h A list	with all available device types can be found on the Leuze website at www.leuze.com.

Notes

Observe intended use!
 This product is not a safety sensor and is not intended as personnel protection. The product may only be put into operation by competent persons. Only use the product in accordance with its intended use.

For UL applications:

✤ For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).

These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

Accessories

Connection technology - Connection cables

	Part no.	Designation	Article	Description
	50132079	KD U-M12-5A-V1- 050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Open end Shielded: No Cable length: 5,000 mm Sheathing material: PVC
W	50135074	KS ET-M12-4A-P7- 050	Connection cable	Suitable for interface: Ethernet Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin Connection 2: Open end Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

Accessories

Leuze

Connection technology - Interconnection cables

	Part no.	Designation	Article	Description
	50135081	KSS ET-M12-4A- RJ45-A-P7-050	Interconnection cable	Suitable for interface: Ethernet Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin Connection 2: RJ45 Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

Connection technology - Y distribution cables

	Part no.	Designation	Article	Description
	50118183	K-Y1 M12A-5m- M12A-S-PUR	Interconnection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Connection 3: Connector, M12, Axial, Female, A-coded, 8 -pin Shielded: Yes Cable length fork 1: 5,000 mm Cable length fork 2: 150 mm Sheathing material: PUR

Mounting technology - Mounting brackets

 Part no.	Designation	Article	Description
 50142900	BT 700M.5-2SET	Mounting device set	Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

Mounting technology - Swivel mounts

	Part no.	Designation	Article	Description
RR.	429046	BT-2R1	Mounting bracket set	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 360° Material: Metal, Plastic

Configuration devices

 Part no.	Designation	Article	Description
50121098	SET MD12-US2-IL1.1 + Zub.	Diagnostics set	Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20

Accessories

Leuze

Services

	Part no.	Designation	Article	Description
ц. С	S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: No mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.
	S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.

	Note
6	♣ A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.