

Technical data sheet Multiple light beam safety device receiver

Part no.: 66555200 MLD520-R3LM



The Sensor People In der Braike 1, 73277 Owen

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com

Phone: +49 7021 573-0 • Fax: +49 7021 573-199

We reserve the right to make technical changes eng • 2021-01-28

Technical data

Leuze

Series	MLD 500
Device type	Receiver
Special version	
Special version	Integrated status indicator
	Reflective element for laser alignment aid
Functions	
unctions	Contactor monitoring (EDM), selectable
	Start/restart interlock (RES), selectable
Characteristic parameters	
уре	4, IEC/EN 61496
SIL	3, IEC 61508
SILCL	3, IEC/EN 62061
Performance Level (PL)	e, EN ISO 13849-1
MTTF _d	204 years, EN ISO 13849-1
PFH _D	6.6E-09 per hour
Mission time T _M	20 years, EN ISO 13849-1
Category	4, EN ISO 13849
Optical data	
lumber of beams	3 Piece(s)
Beam spacing	400 mm
lectrical data	
Protective circuit	Overvoltage protection
	Short circuit protected
Performance data	
Supply voltage U _B	24 V, DC, -20 20 %
Current consumption, max.	150 mA, Without external load
Fuse	External with max. 3 A
Inputs	
Inputs Number of digital switching inputs	3 Piece(s)
Number of digital switching inputs	3 Piece(s)
Number of digital switching inputs Switching inputs	
Number of digital switching inputs	3 Piece(s) Digital switching input 18.2 V
Number of digital switching inputs Switching inputs Type	Digital switching input
Number of digital switching inputs Switching inputs Type Switching voltage high, min.	Digital switching input 18.2 V
Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ.	Digital switching input 18.2 V 2.5 V
Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max.	Digital switching input 18.2 V 2.5 V 23 V
Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type	Digital switching input 18.2 V 2.5 V 23 V DC
Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type	Digital switching input 18.2 V 2.5 V 23 V DC
Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max.	Digital switching input 18.2 V 2.5 V 23 V DC
Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1	Digital switching input 18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 1 Control input for start/restart interlock
Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment	Digital switching input 18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 1
Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment Function	Digital switching input 18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 1 Control input for start/restart interlock
Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment Function Digital switching input 2	Digital switching input 18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 1 Control input for start/restart interlock (RES)
Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment Function Digital switching input 2 Assignment	Digital switching input 18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 1 Control input for start/restart interlock (RES) Connection 1, pin 3
Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment Function Digital switching input 2	Digital switching input 18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 1 Control input for start/restart interlock (RES) Connection 1, pin 3 Control input for contactor monitoring
Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment Function Digital switching input 2 Assignment	Digital switching input 18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 1 Control input for start/restart interlock (RES) Connection 1, pin 3
Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment Function Digital switching input 2 Assignment	Digital switching input 18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 1 Control input for start/restart interlock (RES) Connection 1, pin 3 Control input for contactor monitoring
Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment Function Digital switching input 2 Assignment Function	Digital switching input 18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 1 Control input for start/restart interlock (RES) Connection 1, pin 3 Control input for contactor monitoring
Number of digital switching inputs Switching inputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage low, max. Switching voltage, typ. Voltage type Switching current, max. Digital switching input 1 Assignment Function Digital switching input 2 Assignment Function Digital switching input 2 Assignment Function Digital switching input 3	Digital switching input 18.2 V 2.5 V 23 V DC 5 mA Connection 1, pin 1 Control input for start/restart interlock (RES) Connection 1, pin 3 Control input for contactor monitoring (EDM)

Outputs

Outputs				
	Number of safety-related switching outputs (OSSDs)	2 Piece(s)		
	Number of digital switching outputs	1 Piece(s)		
	Safety-related switching outp	uts		
	Туре	Safety-related switching output OSSD		
	Switching voltage high, min.	18.2 V		
	Switching voltage low, max.	2.5 V		
	Switching voltage, typ.	23 V		
	Voltage type	DC		
	Current load, max.	380 mA		
	Load inductivity	2,200,000 µH		
	Load capacity	0.3 µF		
		0.2 mA		
	Residual current, max.			
	Residual current, typ.	0.002 mA		
	Voltage drop	1 V		
	Safety related ewitching ev	tout 1		
	Safety-related switching ou Assignment	Connection 1, pin 6		
	Switching element	Transistor, PNP		
	Switching element			
	Safety-related switching ou	tput 2		
	Assignment	Connection 1, pin 5		
	Switching element	Transistor, PNP		
	J. J	,		
	Switching outputs			
	Туре	Digital switching output		
	Switching voltage high, min.	18.2 V		
	Switching voltage low, max.	2.5 V		
	Switching voltage, typ.	23 V		
	Voltage type	DC		
	Switching output 1			
	Assignment	Connection 1, pin 1		
	Switching element	Transistor, PNP		
	Function	"State of OSSDs" signal output		
т	iming			
_		0F ma		
	esponse time	25 ms		
R	estart delay time	100 ms		
Connection				
N	umber of connections	1 Piece(s)		
	Composition 1			
	Connection 1 Function	Machine interface		
		Machine interface		
	Type of connection	Connector		
	Thread size	M12		
	Material	Metal		
	No. of pins	8 -pin		
	Cable properties			
	Cable properties Permissible conductor cross	0.25 mm²		
	section, typ.	0.20 mm		
	Length of connection cable, max.	100 m		
	· ·			

(RES)

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com In der Braike 1, 73277 Owen Phone: +49 7021 573-0 • Fax: +49 7021 573-199

Permissible cable resistance to

load, max.

200 Ω

Technical data

Leuze

Mechanical data

Dimension (W x H x L)	52 mm x 900 mm x 64.7 mm
Housing material	Metal
Metal housing	Aluminum
Lens cover material	Plastic / PMMA
Material of end caps	Diecast zinc
Net weight	2,000 g
Housing color	Yellow, RAL 1021
Type of fastening	Groove mounting
	Swivel mount

Operation and display

Type of display	LED
Number of LEDs	1 Piece(s)
Environmental data	
Ambient temperature, operation	-30 55 °C
Ambient temperature, storage	-40 75 °C
Relative humidity (non-condensing)	0 95 %

IP 67	
III	
c CSA US	
c TÜV NRTL US	
TÜV Süd	
US 6,418,546 B	
US 7,741,595 B	
85365019	
85365019 27272703	
27272703	
27272703 27272703	
27272703 27272703 27272703	
27272703 27272703 27272703 27272703	
	III c CSA US c TÜV NRTL US TÜV Süd US 6,418,546 B


EC001832

Certifications

ETIM 7.0

Dimensioned drawings

All dimensions in millimeters

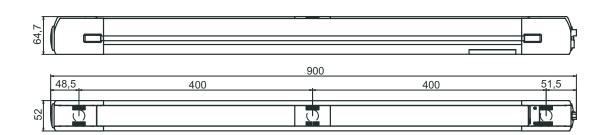

Electrical connection


Connection 1

Function	Machine interface
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

Electrical connection

Leuze

Pin	Pin assignment	Conductor color	
1	RES/OSSD status signal	White	
2	+24V	Brown	
3	EDM	Green	
4	MODE	Yellow	
5	OSSD2	Gray	
6	OSSD1	Pink	
7	0 V	Blue	
8	n.c.	Red	



Operation and display

Display	Meaning
Red, continuous light	OSSD off.
Green, continuous light	OSSD on
Red, flashing, 1 Hz	External error
Red, flashing, 10 Hz	Internal error
Green, flashing, 1 Hz	Weak signal, device not optimally aligned or soiled.
Yellow, continuous light	Start/restart interlock locked.
	Green, continuous light Red, flashing, 1 Hz Red, flashing, 10 Hz Green, flashing, 1 Hz

Suitable transmitters

 Part no.	Designation	Article	Description
66502200	MLD500-T3L	Multiple light beam safety device transmitter	Special version: Integrated laser alignment aid Operating range: 0.5 50 m Number of beams: 3 Piece(s) Beam spacing: 400 mm Connection: Connector, M12, Metal, 5 -pin

Part number code

Part designation: MLDxyy-	-zab/t
MLD	Multiple light beam safety device
x	Series 3: MLD 300 5: MLD 500
уу	Function classes 00: transmitter 10: automatic restart 12: external testing 20: EDM/RES 30: muting 35: timing controlled 4-sensor muting
z	Device type T: transmitter R: receiver RT: transceiver xT: transmitter with high range xR: receiver for high range
a	Number of beams

Part number code

MLD	Multiple light beam safety device				
b	Option L: integrated laser alignment aid (for transmitter/receiver) M: integrated status indicator (MLD 320, MLD 520) or integrated status and muting indicator (MLD 330, MLD 335, MLD 510/A, MLD 530, MLD 535) E: connection socket for external muting indicator (AS-i models only)				
/t	Safety-related switching outputs (OSSDs), connection technology -: transistor output, M12 plug A: integrated AS-i interface, M12 plug, (safety bus system)				
	ote				
6	A list with all available device types can be found on the Leuze website at www.leuze.com.				

Accessories

Connection technology - Connection cables

	Part no.	Designation	Article	Description
Ŭ	50135129	KD S-M12-8A-P1-100	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 10,000 mm Sheathing material: PUR
ľ	50135130	KD S-M12-8A-P1-150	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 15,000 mm Sheathing material: PUR
Ŭ	50135131	KD S-M12-8A-P1-250	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 25,000 mm Sheathing material: PUR
ľ	50135132	KD S-M12-8A-P1-500	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 50,000 mm Sheathing material: PUR

Mounting technology - Swivel mounts

 Part no.	Designation	Article	Description
560340	BT-SET-240BC	Mounting bracket set	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 240° Material: Metal

Accessories

Leuze

 Part no.	Designation	Article	Description
540350	BT-SET-240BC-E	Mounting bracket set	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 240° Material: Metal, Plastic

Services

 Part no.	Designation	Article	Description
S981050	CS40-I-140	Safety inspection "Safety light barriers"	Details: Checking of a safety light barrier application in accordance with current standards and guidelines. Inclusion of the device and machine data in a database, production of a test log per application. Conditions: It must be possible to stop the machine, support provided by customer's employees and access to the machine for Leuze employees must be ensured. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.
S981046	CS40-S-140	Start-up support	Details: For safety devices including stopping time measurement and initial inspection. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: Max. 2 h., no mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.

	Note
6	∜ A li

A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.