

Technical data sheet Stationary bar code reader Part no.: 50113188

BCL 548i SM 102 H



Leuze electronic GmbH + Co. **The Sensor People** In der Braike 1, 73277 Owen

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com In der Braike 1, 73277 Owen Phone: +49 7021 573-0 • Fax: +49 7021 573-199

We reserve the right to make technical changes eng • 2020-12-16

Technical data

Basic data

Series	BCL 500i
061169	
Special version	
Special version	Heating
Functions	
Functions	Alignment mode
	AutoConfig
	AutoControl
	AutoReflAct
	Code fragment technology
	Heating
	Reference code comparison
Characteristic parameters	
MTTF	93 years
Read data	
Code types, readable	2/5 Interleaved
	Codabar
	Code 128
	Code 39
	Code 93
	EAN 128
	EAN 8/13
	EAN Addendum
	GS1 Databar Expanded
	GS1 Databar Limited
	GS1 Databar Omnidirectional
	UPC
Scanning rate, typical	1,000 scans/s
Bar codes per reading gate, max. number	64 Piece(s)
Optical data	
Reading distance	300 1,000 mm
Light source	Laser, Red
Laser light wavelength	650 nm
Laser class	2, IEC/EN 60825-1:2007
Transmitted-signal shape	Continuous
Usable opening angle (reading field opening)	60 °
Bar code contrast (PCS)	60 %
Modulus size	0.35 0.8 mm
Reading method	Line scanner
Scanning rate	800 1,200 scans/s
Beam deflection	Via rotating polygon wheel
Light beam exit	Front
Electrical data	

Protective circuit

Short circuit protected

Performance data Supply voltage $\rm U_B$ Power consumption, max.

24 V, DC, -20 ... 20 % 50 W

	Inputs/outputs selectable	100
	Output current, max.	100 mA
	Number of inputs/outputs selectable	
	Voltage type, outputs	DC
	Switching voltage, outputs	Тур. U _в / 0 V
	Voltage type, inputs	DC
	Switching voltage, inputs	Тур. U _в / 0 V
	Input current, max.	8 mA
In	terface	
т.		PROFINET
ı y	pe	PROFINEI
	Profinet	
	Function	Process
	Conformance class	В
	Protocol	PROFINET RT
	Switch functionality	Integrated
	Transmission speed	100 Mbit/s
S	ervice interface	
Тγ	/pe	USB
Ĩ		
	USB	
	Function	Configuration via software
		Service
C	onnection	
_	onnection	
Nı	umber of connections	5 Piece(s)
Nı		5 Piece(s)
Nu	umber of connections Connection 1	5 Piece(s)
Nu	umber of connections Connection 1 Function	Service interface
Nu	umber of connections Connection 1 Function Type of connection	
Nu	umber of connections Connection 1 Function Type of connection Designation on device	Service interface USB SERVICE
Nu	umber of connections Connection 1 Function Type of connection	Service interface USB
Nu	umber of connections Connection 1 Function Type of connection Designation on device Connector type	Service interface USB SERVICE
Nu	umber of connections Connection 1 Function Type of connection Designation on device Connector type Connection 2	Service interface USB SERVICE USB 2.0 Standard-A
Nu	umber of connections Connection 1 Function Type of connection Designation on device Connector type	Service interface USB SERVICE USB 2.0 Standard-A Signal IN
Nu	umber of connections Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT
Nu	umber of connections Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector
Nu	umber of connections Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT
Nu	Aumber of connections Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12
	Aumber of connections Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female
	Aumber of connections Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal
Nu	umber of connections Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin
	Aumber of connections Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal
Nu	Imber of connections Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin
	umber of connections Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin
	Imber of connections Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3 Function	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin A-coded
	Imber of connections Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3 Function Type of connection	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin A-coded PWR / SW IN / OUT
	Imber of connections Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3 Function	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin A-coded PWR / SW IN / OUT Connector
	umber of connections Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3 Function Type of connection Designation on device Thread size	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin A-coded PWR / SW IN / OUT Connector PWR WIN / OUT
	umber of connections Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3 Function Type of connection	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin A-coded PWR / SW IN / OUT Connector PWR M12
	umber of connections Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3 Function Type of connection Designation on device Thread size Type of connection	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin A-coded PWR / SW IN / OUT Connector PWR MIN / OUT

Leuze

Encoding

A-coded

Technical data

Leuze

Connection 4	
Function	BUS IN
Type of connection	Connector
Designation on device	HOST / BUS IN
Thread size	M12
Туре	Female
Material	Metal
No. of pins	4 -pin
Encoding	D-coded
Connection 5	
Function	BUS OUT
Type of connection	Connector
Designation on device	BUS OUT
Thread size	M12

Female

4 -pin

Mechanical data

No. of pins

Туре

Design	Cubic
Dimension (W x H x L)	123.5 mm x 63 mm x 106.5 mm
Housing material	Metal
Metal housing	Aluminum
Lens cover material	Glass
Net weight	1,100 g
Housing color	Black, RAL 9005
	Red, RAL 3000
Type of fastening	Dovetail grooves
	Mounting thread
	Via optional mounting device

Operation and display

Type of display	LED
	Monochromatic graphical display, 128x64 pixel, with background lighting
Number of LEDs	2 Piece(s)
Type of configuration	Via web browser
Operational controls	Button(s)
	Via service interface

Environmental data

Ambient temperature, operation	-35 40 °C
Ambient temperature, storage	-20 +70 °C
Relative humidity (non-condensing)	90 %
Extraneous light tolerance on the bar code, max.	2,000 lx

Certifications


Degree of protection	IP 65
Protection class	III
Certifications	c UL US
Test procedure for EMC in accordance	EN 55022
with standard	EN 61000-4-2, -3, -4, -6
	EN 61000-6-2
Test procedure for shock in accordance with standard	IEC 60068-2-27, test Ea
Test procedure for continuous shock in accordance with standard	IEC 60068-2-29, test Eb
Test procedure for vibration in accordance with standard	IEC 60068-2-6, test Fc

Classification

Customs tariff number	84719000
eCl@ss 5.1.4	27280102
eCl@ss 8.0	27280102
eCl@ss 9.0	27280102
eCl@ss 10.0	27280102
eCl@ss 11.0	27280102
ETIM 5.0	EC002550
ETIM 6.0	EC002550
ETIM 7.0	EC002550

Dimensioned drawings

All dimensions in millimeters

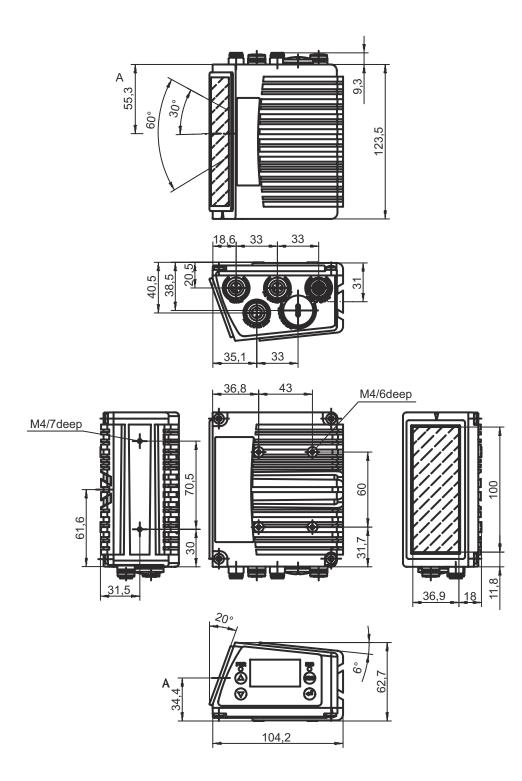

Leuze

Electrical connection

D+ - Data

Connection 1

3

No. of pins

Encoding

Connection 3

The Sensor People In der Braike 1, 73277 Owen

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com

Phone: +49 7021 573-0 • Fax: +49 7021 573-199 eng • 2020-12-16

5/10

Function		Service interface	
Type of connection		USB	
Connect	or type	USB 2.0 Standard-A	
Pin	Pin assignment		
Pin 1	Pin assignment +5 V DC		
Pin 1 2	-		

SERVICE

4	GND	
Connectio	n 2	SW IN/OUT
Function		Signal IN
		Signal OUT
Type of con	nection	Connector
Thread size		M12
Туре		Female
Material		Metal

Pin Pin assignment

2 SWIO 1 3 GND 4 SWIO 2 5 FE	1	VOUT	
4 SWIO 2	2	SWIO 1	
	3	GND	
5 FE	4	SWIO 2	
	5	FE	


5 -pin


PWR

A-coded

Function	PWR / SW IN / OUT
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

Pin	Pin assignment
1	VIN
2	SWIO 3
3	GND
4	SWIO 4
5	FE





Leuze

Electrical connection


Connection 4

HOST /	BU	IS	IN
		.	

Function	BUS IN
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	4 -pin
Encoding	D-coded

Pin Pin assignment

1	TD+
2	RD+
3	TD-
4	RD-




Leuze

Connection 5	BUS OUT	
Function	BUS OUT	
Type of connection	Connector	
Thread size	M12	
Туре	Female	
Material	Metal	
No. of pins	4 -pin	
Encoding	D-coded	

Pin Pin assignment


1	TD+
2	RD+
3	TD-
4	RD-



Diagrams

Leuze

Reading field curve

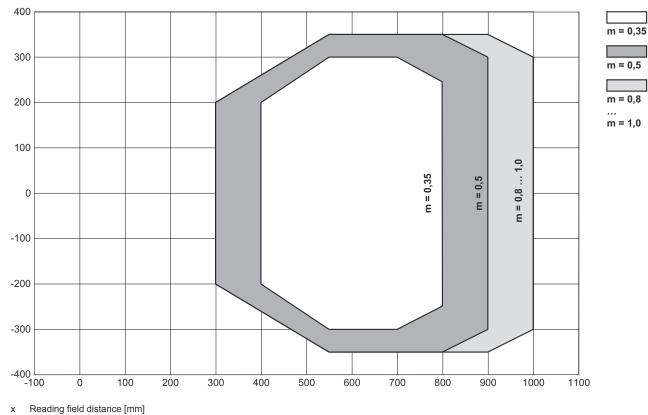

y Reading field width [mm]

Operation and display

LED	Display	Meaning
1 PWR	Off	Device switched off
	Green, flashing	Device ok, initialization phase
	Green, continuous light	Device OK
	Orange, continuous light	Service operation
	Red, flashing	Device OK, warning set
	Red, continuous light	Device error
2 BUS	Off	No supply voltage
	Green, flashing	Initialization
	Green, continuous light	Bus operation ok
	Red, flashing	Communication error
	Red, continuous light	Network error

Part number code

Part designation: BCL XXXX YYZ AAA B



BCL	Operating principle BCL: bar code reader
XXXX	Series/interface (integrated fieldbus technology) 500i: RS 232 / RS 422 / RS 485 (multiNet master) 501i: RS 486 (multiNet slave) 504i: PROFIBUS DP 508i: EtherNet TCP/IP, UDP 548i: PROFINET RT 558i: EtherNet/IP
YY	Scanning principle S: line scanner (single line) O: oscillating-mirror scanner (oscillating mirror)
Z	Optics N: High Density (close) M: Medium Density (medium distance) F: Low Density (remote) L: Long Range (very large distances)
ΑΑΑ	Beam exit 100: lateral 102: front
В	Special equipment H: with heating
Note	

Notes


		Observe intended use!
		b This product is not a safety sensor and is not intended as personnel protection.
<u>/</u>		✤ The product may only be put into operation by competent persons.
	• \	♦ Only use the product in accordance with its intended use.
L	•	to Only use the product in accordance with its intended use.

A list with all available device types can be found on the Leuze website at www.leuze.com.

WARNING! LASER RADIATION - CLASS 2 LASER PRODUCT
Do not stare into beam! The device satisfies the requirements of IEC 60825-1:2007 (EN 60825-1:2007) safety regulations for a product of laser class 2 as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to "Laser Notice No. 50" from June 24, 2007.
Never look directly into the laser beam or in the direction of reflected laser beams! If you look into the beam path over a longer time period, there is a risk of injury to the retina.
∜ Do not point the laser beam of the device at persons!
b Interrupt the laser beam using a non-transparent, non-reflective object if the laser beam is accidentally directed towards a person.
t the when mounting and aligning the device, avoid reflections of the laser beam off reflective surfaces!
Scaution! Use of controls or adjustments or performance of procedures other than specified herein may result in hazardous light exposure.
to Observe the applicable statutory and local laser protection regulations.
So The device must not be tampered with and must not be changed in any way.

There are no user-serviceable parts inside the device. Repairs must only be performed by Leuze electronic GmbH + Co. KG.

Notes

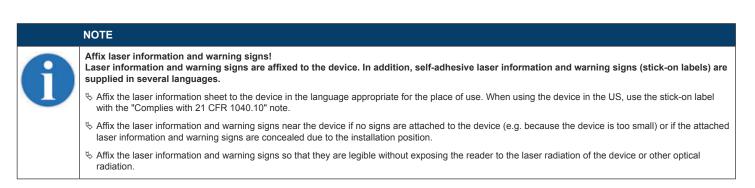

Accessories

Connection technology - Connection cables

 Part no.	Designation	Article	Description
50132079	KD U-M12-5A-V1- 050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Open end Shielded: No Cable length: 5,000 mm Sheathing material: PVC

Connection technology - Interconnection cables

	Part no.	Designation	Article	Description
	50107726	KB USB A - USB A	Interconnection cable	Suitable for interface: USB Connection 1: USB Connection 2: USB Shielded: Yes Cable length: 1,800 mm Sheathing material: PVC
	50137077	KSS ET-M12-4A- M12-4A-P7-020	Interconnection cable	Suitable for interface: Ethernet Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin Connection 2: Connector, M12, Axial, Male, D-coded, 4 -pin Shielded: Yes Cable length: 1,000 mm Sheathing material: PUR
	50137078	KSS ET-M12-4A- M12-4A-P7-050	Interconnection cable	Suitable for interface: Ethernet Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin Connection 2: Connector, M12, Axial, Male, D-coded, 4 -pin Shielded: Yes Cable length: 1,000 mm Sheathing material: PUR
	50135081	KSS ET-M12-4A- RJ45-A-P7-050	Interconnection cable	Suitable for interface: Ethernet Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin Connection 2: RJ45 Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

Leuze

Accessories

Leuze

Mounting technology - Other

 Part no.	Designation	Article	Description
50111224	BT 59	Mounting bracket	Fastening, at system: Groove mounting Mounting bracket, at device: Clampable Material: Metal

Services

	Part no.	Designation	Article	Description
₽ ©	S981020	CS30-E-212	Hourly rate for "Configuration"	Details: Compilation of the application data, selection and suggestion of suitable sensor system, drawing prepared as assembly sketch. Conditions: Completed questionnaire or project specifications with a description of the application have been provided. Restrictions: Travel and accommodation charged separately and according to expenditure.
	S981014	CS30-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: No mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.
	S981019	CS30-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.
	S981021	CS30-V-212	Hourly rate for "Bar code qualification"	Details: REA evaluation with creation of a test report, evaluation of the code quality. Conditions: Original bar codes to be provided by the client.



♦ A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.