

## Technical data sheet Multiple light beam safety device receiver

Part no.: 66075100 MLD335-R2LM



Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com In der Braike 1, 73277 Owen Phone: +49 7021 573-0 • Fax: +49 7021 573-199

We reserve the right to make technical changes eng • 2021-01-28

## **Technical data**

# Leuze

Series	MLD 300		
Device type	Receiver		
Special version			
Special version	Integrated muting indicator		
	Integrated status indicator		
	Reflective element for laser alignment aid		
Functions			
Functions	Alternative connection for second muting signal		
	Contactor monitoring (EDM), selectable		
	Muting enable function		
	Muting-timeout extension		
	Partial muting		
	Sequence controlled 2-sensor muting		
	Start/restart interlock (RES)		
	Timing controlled 2-sensor muting		
	Timing controlled 4-sensor muting		
Characteristic parameters			
Туре	2, IEC/EN 61496		
SIL	1, IEC 61508		
SILCL	1, IEC/EN 62061		
Performance Level (PL)	c, EN ISO 13849-1		
MTTF <sub>d</sub>	204 years, EN ISO 13849-1		
PFH <sub>D</sub>	1.2E-08 per hour		
Mission time T <sub>M</sub>	20 years, EN ISO 13849-1		
Category	3, EN ISO 13849		
Optical data			
Number of beams	2 Piece(s)		
Beam spacing	500 mm		
Electrical data			
Selection of operating mode	Connection 1, pin 2: +24 V for operating mode 1, 2, 4		
	Connection 1, pin 2: 0 V for operating mode 3, 5, 6		
	Connection 1, pin 7: +24 V for operating mode 3, 5, 6		
Desta stine since it	Connection 1, pin 7: 0 V for operating mode 1, 2, 4		
Protective circuit	Overvoltage protection Short circuit protected		
Performance data Supply voltage U <sub>B</sub>	24 V, DC, -20 20 %		
Current consumption, max.	150 mA, Without external load		
Fuse	External with max. 3 A		
Inputs			

Switching inputs			
Туре	Digital switching input		
Switching voltage high, min.	18.2 V		
Switching voltage low, max.	2.5 V		
Switching voltage, typ.	23 V		
Voltage type	DC		
Switching current, max.	5 mA		
Digital switching input 1 Assignment	Connection 1, pin 1		
Function	Control input for start/restart interlock		
Function	(RES)		
Digital switching input 2			
Assignment	Connection 1, pin 3		
Function	Control input for contactor monitoring (EDM)		
Digital switching input 3			
Assignment	Connection 1, pin 4		
Function	Control input, second muting signal		
<b></b>			
Digital switching input 4	Connection 1 pin 9		
Assignment	Connection 1, pin 8		
FUNCTION	Control input, muting enable/ timeout		
utputs			
imber of safety-related switching	2 Piece(s)		
touto (OSSDo)			
tputs (OSSDs)			
imber of digital switching outputs	1 Piece(s)		
imber of digital switching outputs			
umber of digital switching outputs Safety-related switching outp	uts		
mber of digital switching outputs Safety-related switching outp Type	uts Safety-related switching output OSSD		
imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min.	uts Safety-related switching output OSSD 18.2 V		
umber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max.	uts Safety-related switching output OSSD 18.2 V 2.5 V		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ.	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V		
Safety-related switching outputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max.	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH		
Safety-related switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 μH 0.3 μF		
Safety-related switching outputs System of digital switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max.	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH		
Safety-related switching outputs System of digital switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ.	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 μH 0.3 μF 0.2 mA		
Safety-related switching outputs System of digital switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max.	<b>uts</b> Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 μH 0.3 μF 0.2 mA 0.002 mA		
Safety-related switching outputs System of digital switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ.	<b>uts</b> Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 μH 0.3 μF 0.2 mA 0.002 mA 1 V		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop	<b>uts</b> Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 μH 0.3 μF 0.2 mA 0.002 mA 1 V		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V tput 1		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V tput 1 Connection 1, pin 6 Transistor, PNP		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Safety-related switching ou	uts         Safety-related switching output OSSD         18.2 V         2.5 V         23 V         DC         380 mA         2,200,000 μH         0.3 μF         0.2 mA         0.002 mA         1 V         tput 1         Connection 1, pin 6         Transistor, PNP         tput 2		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Safety-related switching ou Assignment	uts           Safety-related switching output OSSD           18.2 V           2.5 V           23 V           DC           380 mA           2,200,000 μH           0.3 μF           0.2 mA           0.002 mA           1 V           tput 1           Connection 1, pin 6           Transistor, PNP           tput 2           Connection 1, pin 5		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Safety-related switching ou	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 μH 0.3 μF 0.2 mA 0.002 mA 1 V tput 1 Connection 1, pin 6 Transistor, PNP tput 2		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Safety-related switching ou Assignment	uts           Safety-related switching output OSSD           18.2 V           2.5 V           23 V           DC           380 mA           2,200,000 μH           0.3 μF           0.2 mA           0.002 mA           1 V           tput 1           Connection 1, pin 6           Transistor, PNP           tput 2           Connection 1, pin 5		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Switching element	uts           Safety-related switching output OSSD           18.2 V           2.5 V           23 V           DC           380 mA           2,200,000 μH           0.3 μF           0.2 mA           0.002 mA           1 V           tput 1           Connection 1, pin 6           Transistor, PNP           tput 2           Connection 1, pin 5		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Switching element Switching element	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V tput 1 Connection 1, pin 6 Transistor, PNP tput 2 Connection 1, pin 5 Transistor, PNP		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Switching element Switching element Switching element Switching outputs Type	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V tput 1 Connection 1, pin 6 Transistor, PNP tput 2 Connection 1, pin 5 Transistor, PNP		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Switching element Switching outputs Type Switching voltage high, min.	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V tput 1 Connection 1, pin 6 Transistor, PNP tput 2 Connection 1, pin 5 Transistor, PNP		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Switching element Switching outputs Type Switching voltage high, min. Switching voltage high, min.	Auts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V tput 1 Connection 1, pin 6 Transistor, PNP tput 2 Connection 1, pin 5 Transistor, PNP Digital switching output 18.2 V 2.5 V		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Switching outputs Type Switching voltage high, min.	uts         Safety-related switching output OSSD         18.2 V         2.5 V         23 V         DC         380 mA         2,200,000 μH         0.3 μF         0.2 mA         0.002 mA         1 V         tput 1         Connection 1, pin 6         Transistor, PNP         tput 2         Connection 1, pin 5         Transistor, PNP         Digital switching output         18.2 V         2.5 V         2.5 V         2.3 V		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Switching outputs Type Switching voltage high, min. Switching voltage, typ. Voltage type Switching output 1	uts         Safety-related switching output OSSD         18.2 V         2.5 V         23 V         DC         380 mA         2,200,000 µH         0.3 µF         0.2 mA         0.002 mA         1 V         tput 1         Connection 1, pin 6         Transistor, PNP         tput 2         Connection 1, pin 5         Transistor, PNP         Digital switching output         18.2 V         2.5 V         23 V         DC		
Imber of digital switching outputs Safety-related switching outp Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Switching outputs Type Switching voltage high, min. Switching voltage, typ. Voltage type	uts         Safety-related switching output OSSD         18.2 V         2.5 V         23 V         DC         380 mA         2,200,000 μH         0.3 μF         0.2 mA         0.002 mA         1 V         tput 1         Connection 1, pin 6         Transistor, PNP         tput 2         Connection 1, pin 5         Transistor, PNP         Digital switching output         18.2 V         2.5 V         2.5 V         2.3 V		

 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 We reserve the rig

 The Sensor People
 In der Braike 1, 73277 Owen
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 we reserve the rig

## **Technical data**

#### Timing

Response time	50 ms		
estart delay time	100 ms		
Connection			
umber of connections	2 Piece(s)		
Connection 1			
Function	Machine interface		
Type of connection	Connector		
Thread size	M12		
Material	Metal		
No. of pins	8 -pin		
Connection 2			
Function	Local interface		
Type of connection	Connector		
Thread size	M12		
Material	Metal		
No. of pins	8 -pin		
Cable properties			
Permissible conductor cross section, typ.	0.25 mm²		
Length of connection cable, max.	100 m		
Permissible cable resistance to load, max.	200 Ω		
lechanical data			
imension (W x H x L)	52 mm x 600 mm x 64.7 mm		
ousing material	Metal		
etal housing	Aluminum		
ens cover material	Plastic / PMMA		
aterial of end caps	Diecast zinc		
·			

Operation and display	
Type of display	Integrated muting indicator LED
Number of LEDs	2 Piece(s)
Environmental data	
Ambient temperature, operation	-30 55 °C
Ambient temperature, storage	-40 75 °C
Relative humidity (non-condensing)	0 95 %
Certifications	
Degree of protection	IP 67
Protection class	III
Certifications	c CSA US
	c TÜV NRTL US
	TÜV Süd
US patents	US 6,418,546 B
	US 7,741,595 B
Classification	
Customs tariff number	85365019
eCl@ss 5.1.4	27272703
eCl@ss 8.0	27272703
eCl@ss 9.0	27272703
eCl@ss 10.0	27272703
eCl@ss 11.0	27272703
ETIM 5.0	EC001832
ETIM 6.0	EC001832
ETIM 7.0	EC001832

Leuze


## **Dimensioned drawings**

All dimensions in millimeters

Net weight

Housing color

Type of fastening

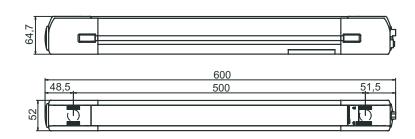

1,400 g

Yellow, RAL 1021

Groove mounting Swivel mount

## **Electrical connection**

## Leuze


#### **Connection 1**

Function	Machine interface
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

## Pin Pin assignment

#### **Conductor color**


1         RES         White           2         VIN         Brown	
2 VIN Brown	
3 EDM Green	
4 MS2 Yellow	
5 OSSD2 Gray	
6 OSSD1 Pink	
7 VIN Blue	
8 M-EN/TO Red	



#### **Connection 2**

Function	Local interface
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

Pin	Pin assignment	Conductor color		
1	MS3	White		
2	+24V	Brown		
3	MS2	Green		
4	MS1	Yellow		
5	RES/LMP	Gray		
6	MS4	Pink		
7	0 V	Blue		
8	n.c.	Red		



## **Operation and display**

LED	Display	Meaning
1	Red, continuous light	OSSD off.
	Green, continuous light	OSSD on
	Red, flashing, 1 Hz	External error
	Red, flashing, 10 Hz	Internal error
	Green, flashing, 1 Hz	Weak signal, device not optimally aligned or soiled.
2	Yellow, continuous light	Start/restart interlock locked.

## Suitable transmitters



 Part no.	Designation	Article	Description
66002100	MLD300-T2L	Multiple light beam safety device transmitter	Special version: Integrated laser alignment aid Operating range: 0.5 50 m Number of beams: 2 Piece(s) Beam spacing: 500 mm Connection: Connector, M12, Metal, 5 -pin

### Part number code

MLD	Multiple light beam safety device
x	<b>Series</b> 3: MLD 300 5: MLD 500
уу	Function classes 00: transmitter 10: automatic restart 12: external testing 20: EDM/RES 30: muting 35: timing controlled 4-sensor muting
z	Device type T: transmitter R: receiver RT: transceiver xT: transmitter with high range xR: receiver for high range
а	Number of beams
b	Option L: integrated laser alignment aid (for transmitter/receiver) M: integrated status indicator (MLD 320, MLD 520) or integrated status and muting indicator (MLD 330, MLD 335, MLD 510/A, MLD 530, MLD 535) E: connection socket for external muting indicator (AS-i models only)
/t	Safety-related switching outputs (OSSDs), connection technology -: transistor output, M12 plug A: integrated AS-i interface, M12 plug, (safety bus system)
N	lote
<b>(</b> )	A list with all available device types can be found on the Leuze website at www.leuze.com.

## Accessories

## Connection technology - Connection cables

 Part no.	Designation	Article	Description
50133859	KD S-M12-5A-P1-020	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Open end Shielded: Yes Cable length: 2,000 mm Sheathing material: PUR

## Acc

Accessories							
		Part no.	Designation	Article	Description		
		50136146	KD S-M12-5A-P1-250	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Open end Shielded: Yes Cable length: 10,000 mm Sheathing material: PVC		
	u.v []	50135128	KD S-M12-8A-P1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR		

### Services

	Part no.	Designation	Article	Description
()	S981050	CS40-I-140	Safety inspection "Safety light barriers"	Details: Checking of a safety light barrier application in accordance with current standards and guidelines. Inclusion of the device and machine data in a database, production of a test log per application. Conditions: It must be possible to stop the machine, support provided by customer's employees and access to the machine for Leuze employees must be ensured. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.
U.	S981046	CS40-S-140	Start-up support	Details: For safety devices including stopping time measurement and initial inspection. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: Max. 2 h., no mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.

Note

the A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.