


Technical data sheet Light curtain receiver Part no.: 50119775 CML720i-R20-950.A/L-M12

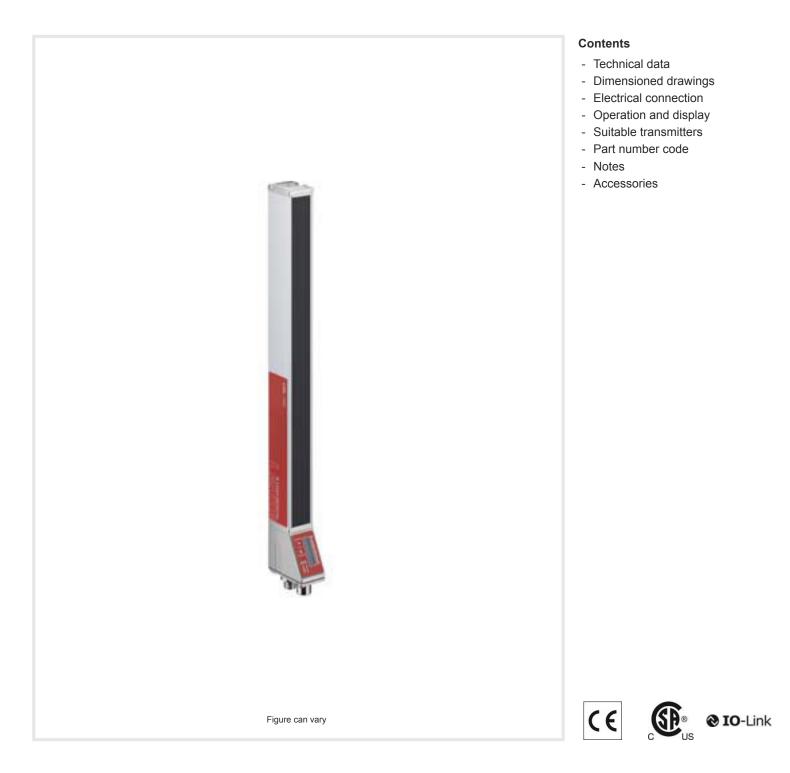

 The Sensor People
 Leuze electronic GmbH + Co. H

 In der Braike 1, 73277 Owen

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com In der Braike 1, 73277 Owen Phone: +49 7021 573-0 • Fax: +49 7021 573-199

Technical data

Leuze

Series	720		
Operating principle	Throughbeam principle		
Device type	Receiver		
Contains	2x BT-NC sliding block		
Application	Object measurement		
Special version			
Special version	Crossed-beam scanning		
	Diagonal-beam scanning		
	Parallel-beam scanning		
Optical data			
Operating range	Guaranteed operating range		
Operating range	0.3 7 m		
Operating range limit	Typical operating range		
Operating range limit	0.2 9 m		
Measurement field length	950 mm		
Number of beams	48 Piece(s)		
Beam spacing	20 mm		
Measurement data			
	30 mm		
Minimum object diameter	JU MIN		
Electrical data			
Protective circuit	Polarity reversal protection		
	Short circuit protected		
	Transient protection		
Performance data			
Supply voltage U _B	18 30 V, DC		
Residual ripple	0 15 %, From U _B		
	0 215 mA, The specified values refer		
Open-circuit current			
	to the entire package consisting of trans		
Inputs/outputs selectable	to the entire package consisting of transmitter and receiver.		
Inputs/outputs selectable Output current, max.	to the entire package consisting of transmitter and receiver.		
Inputs/outputs selectable Output current, max. Input resistance	to the entire package consisting of transmitter and receiver. 100 mA 6,000 Ω		
Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable	to the entire package consisting of transmitter and receiver. 100 mA 6,000 Ω 4 Piece(s)		
Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type	to the entire package consisting of transmitter and receiver. 100 mA 6,000 Ω 4 Piece(s) Inputs/outputs selectable		
Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs	to the entire package consisting of transmitter and receiver. 100 mA 6,000 Ω 4 Piece(s) Inputs/outputs selectable DC		
Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs	to the entire package consisting of transmitter and receiver. 100 mA 6,000 Ω 4 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V		
Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs	to the entire package consisting of transmitter and receiver. The formula of the entire package consisting of transmitter and receiver. The entire package consistence and		
Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs	to the entire package consisting of transmitter and receiver. 100 mA 6,000 Ω 4 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: ≥6V		
Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs	to the entire package consisting of transmitter and receiver. The formula of the entire package consisting of transmitter and receiver. The entire package consistence and		
Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs	to the entire package consisting of transmitter and receiver. 100 mA 6,000 Ω 4 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: \geq 6V		
Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs	to the entire package consisting of transmitter and receiver. 100 mA 6,000 Ω 4 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: \geq 6V		
Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1 Activation/disable delay	to the entire package consisting of transmitter and receiver. 100 mA $6,000 \Omega$ 4 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: $\geq 6V$ Iow: $\leq 4V$		
Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1 Activation/disable delay	to the entire package consisting of transmitter and receiver. 100 mA $6,000 \Omega$ 4 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: $\geq 6V$ Iow: $\leq 4V$ 0 1 ms		
Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1 Activation/disable delay Timing Readiness delay	to the entire package consisting of trans mitter and receiver. 100 mA 6,000 Ω 4 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: ≥6V Iow: ≤4V 0 1 ms		
Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Switching voltage, inputs Input/output 1 Activation/disable delay Timing Readiness delay Cycle time	to the entire package consisting of transmitter and receiver. 100 mA $6,000 \Omega$ 4 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: ≥6V Iow: ≤4V 0 1 ms 400 ms 1.84 ms		
Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1 Activation/disable delay Timing Readiness delay	to the entire package consisting of trans mitter and receiver. 100 mA 6,000 Ω 4 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: ≥6V Iow: ≤4V 0 1 ms		
Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Switching voltage, inputs Input/output 1 Activation/disable delay Timing Readiness delay Cycle time	to the entire package consisting of transmitter and receiver. 100 mA $6,000 \Omega$ 4 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: ≥6V Iow: ≤4V 0 1 ms 400 ms 1.84 ms		

0
.3 ms
ion via software
ion interface
Т
pply
n to transmitter
5.4 mm x 1,035 mm
ounting
al mounting device
olay
e keyboard
<u></u>
c c

 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 We reserve the rig

 The Sensor People
 In der Braike 1, 73277 Owen
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 we reserve the rig

Technical data

Leuze

Certifications


Degree of protection	IP 65
Protection class	III
Certifications	c CSA US
Standards applied	IEC 60947-5-2

Classification

Customs tariff number	90314990
eCl@ss 5.1.4	27270910
eCl@ss 8.0	27270910
eCl@ss 9.0	27270910
eCl@ss 10.0	27270910
eCl@ss 11.0	27270910
ETIM 5.0	EC002549
ETIM 6.0	EC002549
ETIM 7.0	EC002549

Dimensioned drawings

All dimensions in millimeters

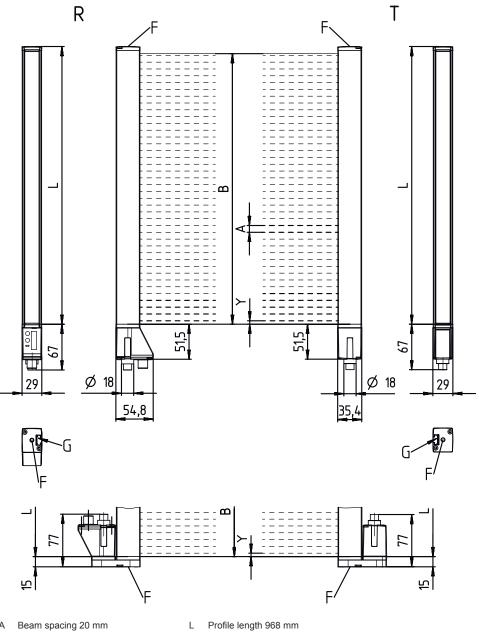

Beam spacing 20 mm А

Fastening groove

- В Measurement field length 950 mm
- F M6 thread

G

R Receiver

Т

Υ 5 mm


Transmitter



Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com The Sensor People In der Braike 1, 73277 Owen

Dimensioned drawings



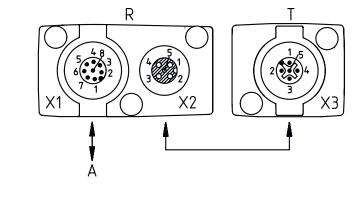

A PWR / SW IN / OUT


Electrical connection

Connection 1

Function	Configuration interface
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

Pin Pin assignment

1	V+		
2	IO1		
3	GND		
4	IO-Link		
5	102		
6	IO3		
7	IO4		
8	GND		



Connection 2

Function	Connection to transmitter
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

Pin Pin assignment

1	FE/SHIELD
2	V+
3	GND
4	RS 485 Tx+
5	RS 485 Tx-



Operation and display

LEDDisplayMeaning1Green, continuous lightOperational readiness2Yellow, continuous lightTeach / error2Yellow, continuous lightLight path free, with function reserveYellow, flashingNo function reserveOffObject detected

Suitable transmitters

 Part no.	Designation	Article	Description
50119428	CML720i-T20-950.A- M12	Light curtain transmitter	Operating range: 0.3 6 m Connection: Connector, M12, Axial, 5 -pin

Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

Note A list with all available device types can be found on the Leuze website at www.leuze.com.			
FFF	-EX: Explosion protection		
EEE	Electrical connection M12: M12 connector		
DDD	Special equipment -PS: Power Setting		
CCC	Interface L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus		
В	Equipment A: connector outlet, axial R: rear connector outlet		
AAAA	Measurement field length [mm], dependent on beam spacing		
ZZ	Beam spacing 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm		
Y	Device type T: transmitter R: receiver		
7XXi	Series 720i: 720i series 730i: 730i series		
CML	Operating principle Measuring light curtain		

Leuze

Notes

Observe intended use!

✤ This product is not a safety sensor and is not intended as personnel protection.

 $\ensuremath{^{\ensuremath{\Downarrow}}}$ The product may only be put into operation by competent persons.

 $\ensuremath{^{\ensuremath{\Downarrow}}}$ Only use the product in accordance with its intended use.

	For UL applications:
A	 For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code). These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

Accessories

Connection technology - Connection cables

	Part no.	Designation	Article	Description
	50135128	KD S-M12-8A-P1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

Connection technology - Interconnection cables

	Part no.	Designation	Article	Description
	50129781	KDS DN-M12-5A- M12-5A-P3-050	Interconnection cable	Suitable for interface: IO-Link, DeviceNet, CANopen Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

Mounting technology - Mounting brackets

	Part no.	Designation	Article	Description
1 + 1 + + + + + + + + + + + + + + + + +	50142900	BT 700M.5-2SET	Mounting device set	Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

7/8

Leuze

Accessories



Mounting technology - Swivel mounts

	Part no.	Designation	Article	Description
ęę.	429046	BT-2R1	Mounting bracket set	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 360° Material: Metal, Plastic

Configuration devices

 Part no.	Designation	Article	Description
50121098	SET MD12-US2-IL1.1 + Zub.	Diagnostics set	Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20

Services

	Part no.	Designation	Article	Description
с. С.	S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: No mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.
	S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.

	Note
A	∜ A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.

 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 We reserve the right to make technical changes

 The Sensor People
 In der Braike 1, 73277 Owen
 info@leuze.com • www.leuze.com
 were electronic GmbH + Co. KG
 eng • 2020-12-17