

# **Technical data sheet** Light curtain receiver

Part no.: 50119788

CML720i-R40-290.A/L-M12



### Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Operation and display
- Suitable transmitters
- Part number code
- Notes
- Accessories







### **Technical data**



	lata

Series	720
Operating principle	Throughbeam principle
Device type	Receiver
Contains	2x BT-NC sliding block
Application	Object measurement

### **Special version**

Special version	Crossed-beam scanning
	Diagonal-beam scanning
	Parallel-beam scanning

### **Optical data**

Operating range	Guaranteed operating range
Operating range	0.3 7 m
Operating range limit	Typical operating range
Operating range limit	0.2 9 m
Measurement field length	290 mm
Number of beams	7 Piece(s)
Beam spacing	40 mm

#### Measurement data

Minimum object	diameter
----------------	----------

50	mm
----	----

### **Electrical data**

Protective circuit	Polarity reversal protection
	Short circuit protected
	Transient protection

### Performance data

Supply voltage U <sub>B</sub>	18 30 V, DC
Residual ripple	0 15 %, From U <sub>B</sub>
Open-circuit current	0 165 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.

### Inputs/outputs selectable

Output current, max.	100 mA	
Input resistance	6,000 Ω	
Number of inputs/outputs selectable 4 Piece(s)		
Туре	Inputs/outputs selectable	
Voltage type, outputs	DC	
Switching voltage, outputs	Typ. U <sub>B</sub> / 0 V	
Voltage type, inputs	DC	
Switching voltage, inputs	high: ≥6V	
	low: ≤4V	

### Input/output 1

Activation/disable delay	0 1 ms
Activation/disable delay	0 1 ms

### **Timing**

Readiness delay	400 ms
Cycle time	1 ms
Response time per beam	30 μs

### Interface

Туре	IO-Lir

IO-Link	
COM mode	COM2
Specification	V1.0.1
	V1.1
Min. cycle time	COM2 = 2.3 ms

### Service interface

Туре	IO-Link
IO-Link	
Function	Configuration via software
	Service

#### Connection

Number of connections	2 Piece(s)
Plug outlet	Axial

#### Connection 1

Connection	
Function	Configuration interface
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

### Connection 2

Function	Connection to transmitter
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

### **Mechanical data**

Design	Cubic
Dimension (W x H x L)	29 mm x 35.4 mm x 395 mm
Housing material	Metal
Metal housing	Aluminum
Lens cover material	Plastic
Net weight	550 g
Housing color	Silver
Type of fastening	Groove mounting
	Via optional mounting device

### Operation and display

Type of display	LED
	OLED display
Number of LEDs	2 Piece(s)
Type of configuration	Software
	Teach-in
Operational controls	Membrane keyboard

### **Environmental data**

Ambient temperature, operation	-30 60 °C
Ambient temperature, storage	-40 70 °C

### **Technical data**



### Certifications

Degree of protection	IP 65
Protection class	III
Certifications	c CSA US
Standards applied	IEC 60947-5-2


### Classification

Customs tariff number	90314990
eCl@ss 5.1.4	27270910
eCl@ss 8.0	27270910
eCl@ss 9.0	27270910
eCl@ss 10.0	27270910
eCI@ss 11.0	27270910
ETIM 5.0	EC002549
ETIM 6.0	EC002549
ETIM 7.0	EC002549

## **Dimensioned drawings**

Leuze


All dimensions in millimeters

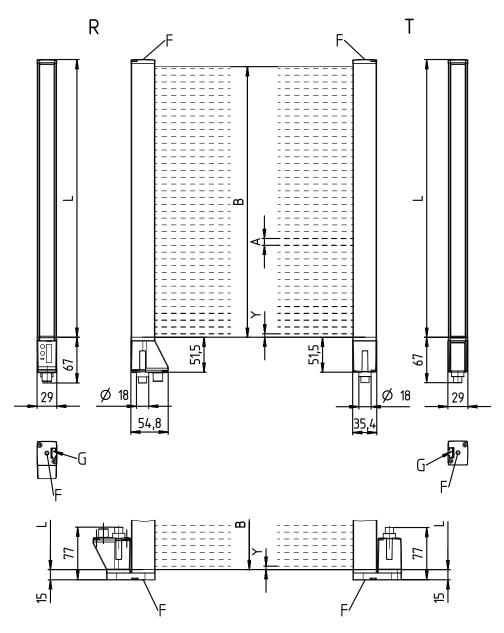

- A Beam spacing 40 mm
- B Measurement field length 290 mm
- F M6 thread
- G Fastening groove
- L Profile length 328 mm
- T Transmitter
- R Receiver
- Y 5 mm

## **Dimensioned drawings**



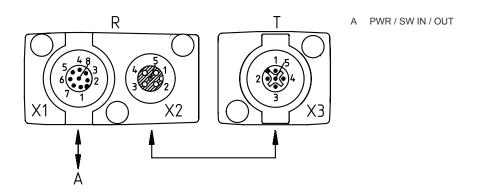


## **Electrical connection**

### **Connection 1**

Function	Configuration interface
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

Pin	Pin assignment
1	V+
2	IO1
3	GND
4	IO-Link
5	102
6	103
7	104
8	GND
•	C.I.S



#### **Connection 2**

Function	Connection to transmitter
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

Pin	Pin assignment
1	FE/SHIELD
2	V+
3	GND
4	RS 485 Tx+
5	RS 485 Tx-



## **Operation and display**



LED	Display	Meaning
1	Green, continuous light	Operational readiness
	Green, flashing	Teach / error
2	Yellow, continuous light	Light path free, with function reserve
	Yellow, flashing	No function reserve
	Off	Object detected

### Suitable transmitters

Part no.	Designation	Article	Description
50119441	CML720i-T40-290.A- M12	Light curtain transmitter	Operating range: 0.3 6 m Connection: Connector, M12, Axial, 5 -pin

### Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

CML	Operating principle Measuring light curtain
7XXi	Series           720i: 720i series           730i: 730i series
Υ	Device type T: transmitter R: receiver
ZZ	Beam spacing 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm
AAAA	Measurement field length [mm], dependent on beam spacing
В	Equipment A: connector outlet, axial R: rear connector outlet
ccc	Interface L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus
DDD	Special equipment -PS: Power Setting
EEE	Electrical connection M12: M12 connector
FFF	-EX: Explosion protection

#### Note



☼ A list with all available device types can be found on the Leuze website at www.leuze.com.

### **Notes**





### Observe intended use!



- \$ This product is not a safety sensor and is not intended as personnel protection.
- \$ The product may only be put into operation by competent persons.
- by Only use the product in accordance with its intended use.

### For UL applications:



- 🕏 For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).
- These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/CYJV7 or PVVA/PVVA7)

### **Accessories**

## Connection technology - Connection cables

Part no.	Designation	Article	Description
50135128	KD S-M12-8A-P1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

## Connection technology - Interconnection cables

	Part no.	Designation	Article	Description
	50129781	KDS DN-M12-5A- M12-5A-P3-050	Interconnection cable	Suitable for interface: IO-Link, DeviceNet, CANopen Connection 1: Connector, M12, Axial, Female, A-coded, 5-pin Connection 2: Connector, M12, Axial, Male, A-coded, 5-pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

## Mounting technology - Mounting brackets

Part no.	Designation	Article	Description
50142900	BT 700M.5-2SET	Mounting device set	Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

### **Accessories**



## Mounting technology - Swivel mounts

	Part no.	Designation	Article	Description
R.	429046	BT-2R1	Mounting bracket set	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 360° Material: Metal, Plastic

## Configuration devices

	Part no.	Designation	Article	Description
165	50121098	SET MD12-US2-IL1.1 + Zub.	Diagnostics set	Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20

### Services

Part no.	Designation	Article	Description
S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours.  Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.  Restrictions: No mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.
S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses.  Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.

### Note



🔖 A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.