

## Technical data sheet

### Deflecting mirror

Part no.: 66500201

MLD-XM03

#### Contents

- Technical data
- Dimensioned drawings
- Accessories



Figure can vary

## Technical data

### Protective field data

Achievable range	0 ... 8 m
------------------	-----------

### Optical data

Number of beams	3 Piece(s)
Beam spacing	400 mm

### Mechanical data

Dimension (W x H x L)	52 mm x 894 mm x 64.7 mm
Housing material	Metal
Metal housing	Aluminum
Lens cover material	Plastic / PMMA
Material of end caps	Diecast zinc
Net weight	2,000 g
Housing color	Yellow, RAL 1021
Type of fastening	Groove mounting Mounting on Device Column Swivel mount

### Environmental data


Ambient temperature, operation	-30 ... 55 °C
Ambient temperature, storage	-40 ... 75 °C
Relative humidity (non-condensing)	0 ... 95 %

### Classification

Customs tariff number	85389099
eCl@ss 5.1.4	27279207
eCl@ss 8.0	27279207
eCl@ss 9.0	27273605
eCl@ss 10.0	27273605
eCl@ss 11.0	27273605
ETIM 5.0	EC002467
ETIM 6.0	EC002467
ETIM 7.0	EC002467


## Dimensioned drawings

All dimensions in millimeters

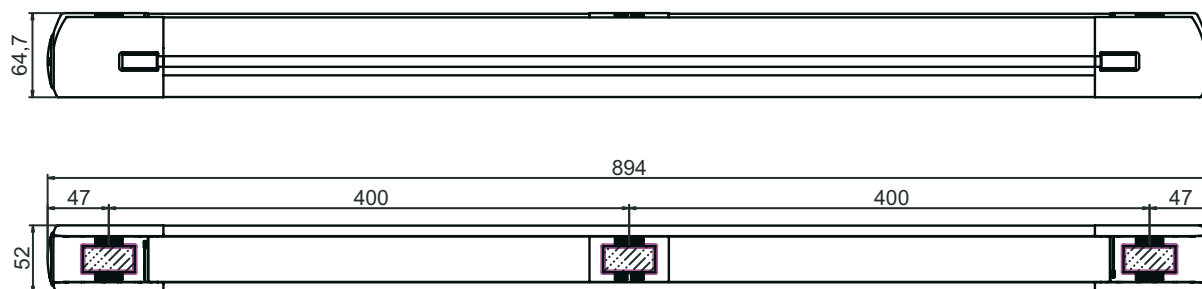

## Accessories

### Mounting technology - Swivel mounts

	Part no.	Designation	Article	Description
	540351	BT-SET-240CC-E	Mounting bracket set	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 240° Material: Metal, Plastic

### Note



A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.