

## Technical data sheet

## Stationary bar code reader

Part no.: 50143209

BCL 208i SM 110



Figure can vary

### Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- Operation and display
- Part number code
- Notes
- Accessories



Ethernet



## Technical data

### Basic data

|        |          |
|--------|----------|
| Series | BCL 200i |
|--------|----------|

### Functions

|           |                           |
|-----------|---------------------------|
| Functions | Alignment mode            |
|           | AutoConfig                |
|           | AutoControl               |
|           | AutoReflAct               |
|           | Code fragment technology  |
|           | LED indicator             |
|           | Reference code comparison |

### Read data

|   |                             |
|---|-----------------------------|
| Code types, readable                    | 2/5 Interleaved             |
|   | Codabar                     |
|   | Code 128                    |
|   | Code 39                     |
|   | Code 93                     |
|   | EAN 8/13                    |
|   | GS1 Databar Expanded        |
|   | GS1 Databar Limited         |
|   | GS1 Databar Omnidirectional |
|   | UPC                         |
| Scanning rate, typical                  | 1,000 scans/s               |
| Bar codes per reading gate, max. number | 64 Piece(s)                 |

### Optical data

|  |   |
|--|---|
| Reading distance                             | 40 ... 255 mm   |
| Light source                                 | Laser, Red  |
| Laser light wavelength                       | 655 nm  |
| Laser class                                  | 1, IEC / EN 60825-1:2014                                      |
| Transmitted-signal shape                     | Continuous  |
| Usable opening angle (reading field opening) | 60 °  |
| Modulus size                                 | 0.2 ... 0.5 mm  |
| Reading method                               | Line scanner with deflecting mirror                           |
| Beam deflection                              | By means of rotating polygon mirror wheel + deflecting mirror |
| Light beam exit                              | Lateral with deflecting mirror                                |

### Electrical data

|                    |                              |
|--------------------|------------------------------|
| Protective circuit | Polarity reversal protection |
|--------------------|------------------------------|

#### Performance data

|                         |                 |
|-------------------------|-----------------|
| Supply voltage $U_B$    | 18 ... 30 V, DC |
| Power consumption, max. | 4 W             |

#### Inputs

|                                    |            |
|------------------------------------|------------|
| Number of digital switching inputs | 1 Piece(s) |
|------------------------------------|------------|

#### Switching inputs

|                     |      |
|---------------------|------|
| Voltage type        | DC   |
| Input current, max. | 8 mA |

#### Outputs

|                                     |            |
|-------------------------------------|------------|
| Number of digital switching outputs | 1 Piece(s) |
|-------------------------------------|------------|

#### Switching outputs

|                         |       |
|-------------------------|-------|
| Voltage type            | DC    |
| Switching current, max. | 60 mA |

### Interface

|      |          |
|------|----------|
| Type | Ethernet |
|------|----------|

#### Ethernet

|                       |                           |
|-----------------------|---------------------------|
| Architecture          | Client                    |
|                       | Server                    |
| Address assignment    | DHCP                      |
|                       | Manual address assignment |
| Transmission speed    | 10 Mbit/s                 |
|                       | 100 Mbit/s                |
| Function              | Process                   |
| Switch functionality  | None                      |
| Transmission protocol | TCP/IP, UDP               |

### Connection

|                       |            |
|-----------------------|------------|
| Number of connections | 2 Piece(s) |
|-----------------------|------------|

#### Connection 1

|                      |                      |
|----------------------|----------------------|
| Function             | Signal IN            |
|                      | Signal OUT           |
|                      | Voltage supply       |
| Type of connection   | Cable with connector |
| Cable length         | 900 mm               |
| Sheathing material   | PVC                  |
| Cable color          | Black                |
| Number of conductors | 5 -wire              |
| Thread size          | M12                  |
| Type                 | Male                 |
| Material             | Plastic              |
| No. of pins          | 5 -pin               |
| Encoding             | A-coded              |

#### Connection 2

|                      |                         |
|----------------------|-------------------------|
| Function             | Configuration interface |
|                      | Data interface          |
| Type of connection   | Cable with connector    |
| Cable length         | 700 mm                  |
| Sheathing material   | PVC                     |
| Cable color          | Green                   |
| Number of conductors | 4 -wire                 |
| Thread size          | M12                     |
| Type                 | Female                  |
| Material             | Plastic                 |
| No. of pins          | 4 -pin                  |
| Encoding             | D-coded                 |

### Mechanical data

|                       |                              |
|-----------------------|------------------------------|
| Design                | Cubic                        |
| Dimension (W x H x L) | 93 mm x 38 mm x 83 mm        |
| Housing material      | Metal                        |
| Metal housing         | Diecast aluminum             |
| Lens cover material   | Glass                        |
| Net weight            | 400 g                        |
| Housing color         | Silver                       |
| Type of fastening     | Dovetail grooves             |
|                       | Fastening on back            |
|                       | Via optional mounting device |

## Technical data

### Operation and display

|                       |                 |
|-----------------------|-----------------|
| Type of display       | LED             |
| Number of LEDs        | 3 Piece(s)      |
| Type of configuration | Via web browser |

### Environmental data

|                                    |               |
|------------------------------------|---------------|
| Ambient temperature, operation     | 0 ... 40 °C   |
| Ambient temperature, storage       | -20 ... 70 °C |
| Relative humidity (non-condensing) | 0 ... 90 %    |

### Certifications


|   |                              |
|---|------------------------------|
| Degree of protection  | IP 65                        |
| Protection class  | III                          |
| Test procedure for EMC in accordance with standard              | EN 61000-6-2<br>EN 61000-6-3 |
| Test procedure for shock in accordance with standard            | IEC 60068-2-27, test Ea      |
| Test procedure for continuous shock in accordance with standard | IEC 60068-2-29, test Eb      |
| Test procedure for vibration in accordance with standard        | IEC 60068-2-6, test Fc       |

### Classification

|                       |          |
|-----------------------|----------|
| Customs tariff number | 84719000 |
| eCl@ss 5.1.4          | 27280102 |
| eCl@ss 8.0            | 27280102 |
| eCl@ss 9.0            | 27280102 |
| eCl@ss 10.0           | 27280102 |
| eCl@ss 11.0           | 27280102 |
| ETIM 5.0              | EC002550 |
| ETIM 6.0              | EC002550 |
| ETIM 7.0              | EC002550 |

# Dimensioned drawings

All dimensions in millimeters

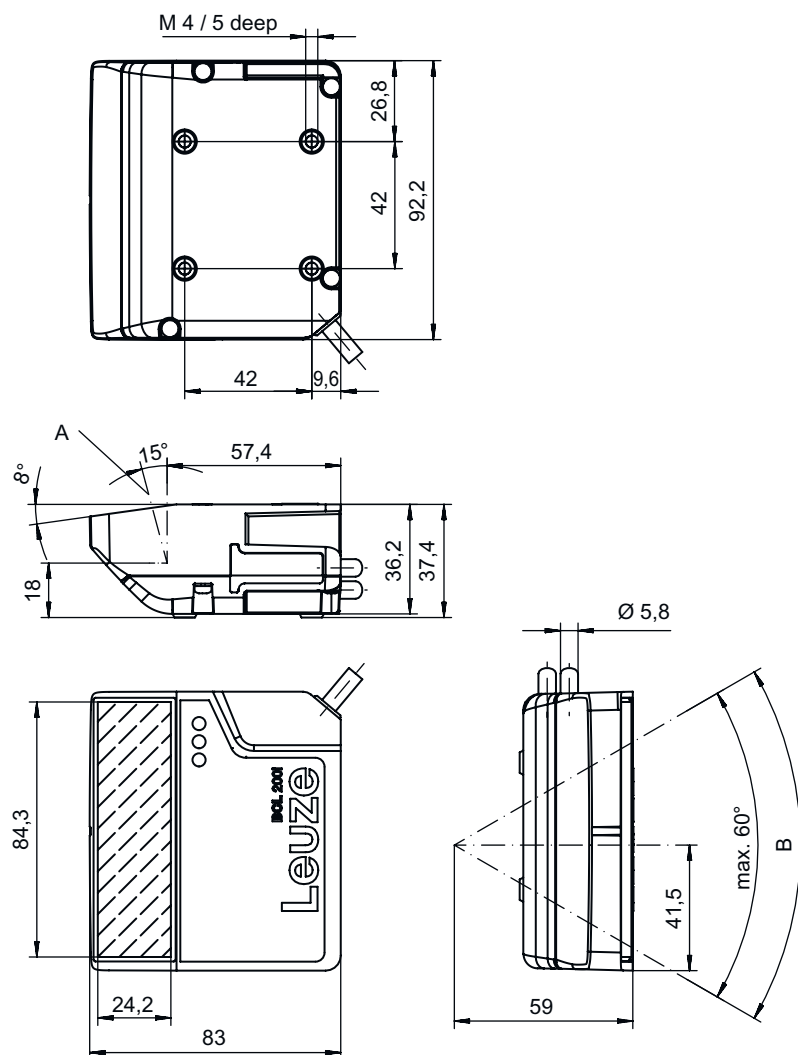

- A Optical axis
- B Deflection angle of the laser beam:  $\pm 30^\circ$

## Electrical connection

### Connection 1

|                      |                      |
|----------------------|----------------------|
| Function             | Signal IN            |
|                      | Signal OUT           |
|                      | Voltage supply       |
| Type of connection   | Cable with connector |
| Cable length         | 900 mm               |
| Sheathing material   | PVC                  |
| Cable color          | Black                |
| Number of conductors | 5 -wire              |
| Thread size          | M12                  |
| Type                 | Male                 |
| Material             | Plastic              |
| No. of pins          | 5 -pin               |
| Encoding             | A-coded              |

## Electrical connection

### Pin Pin assignment

|   |        |
|---|--------|
| 1 | VIN    |
| 2 | SWIN 1 |
| 3 | GNDIN  |
| 4 | SWO 1  |
| 5 | FE     |




### Connection 2

|                             |   |
|-----------------------------|---|
| <b>Function</b>             | Configuration interface<br>Data interface |
| <b>Type of connection</b>   | Cable with connector                      |
| <b>Cable length</b>         | 700 mm                                    |
| <b>Sheathing material</b>   | PVC                                       |
| <b>Cable color</b>          | Green                                     |
| <b>Number of conductors</b> | 4 -wire                                   |
| <b>Thread size</b>          | M12                                       |
| <b>Type</b>                 | Female                                    |
| <b>Material</b>             | Plastic                                   |
| <b>No. of pins</b>          | 4 -pin                                    |
| <b>Encoding</b>             | D-coded                                   |


### Pin Pin assignment

|   |      |
|---|------|
| 1 | TD0+ |
| 2 | RD0+ |
| 3 | TD0- |
| 4 | RD0- |



# Diagrams

## Reading field curve

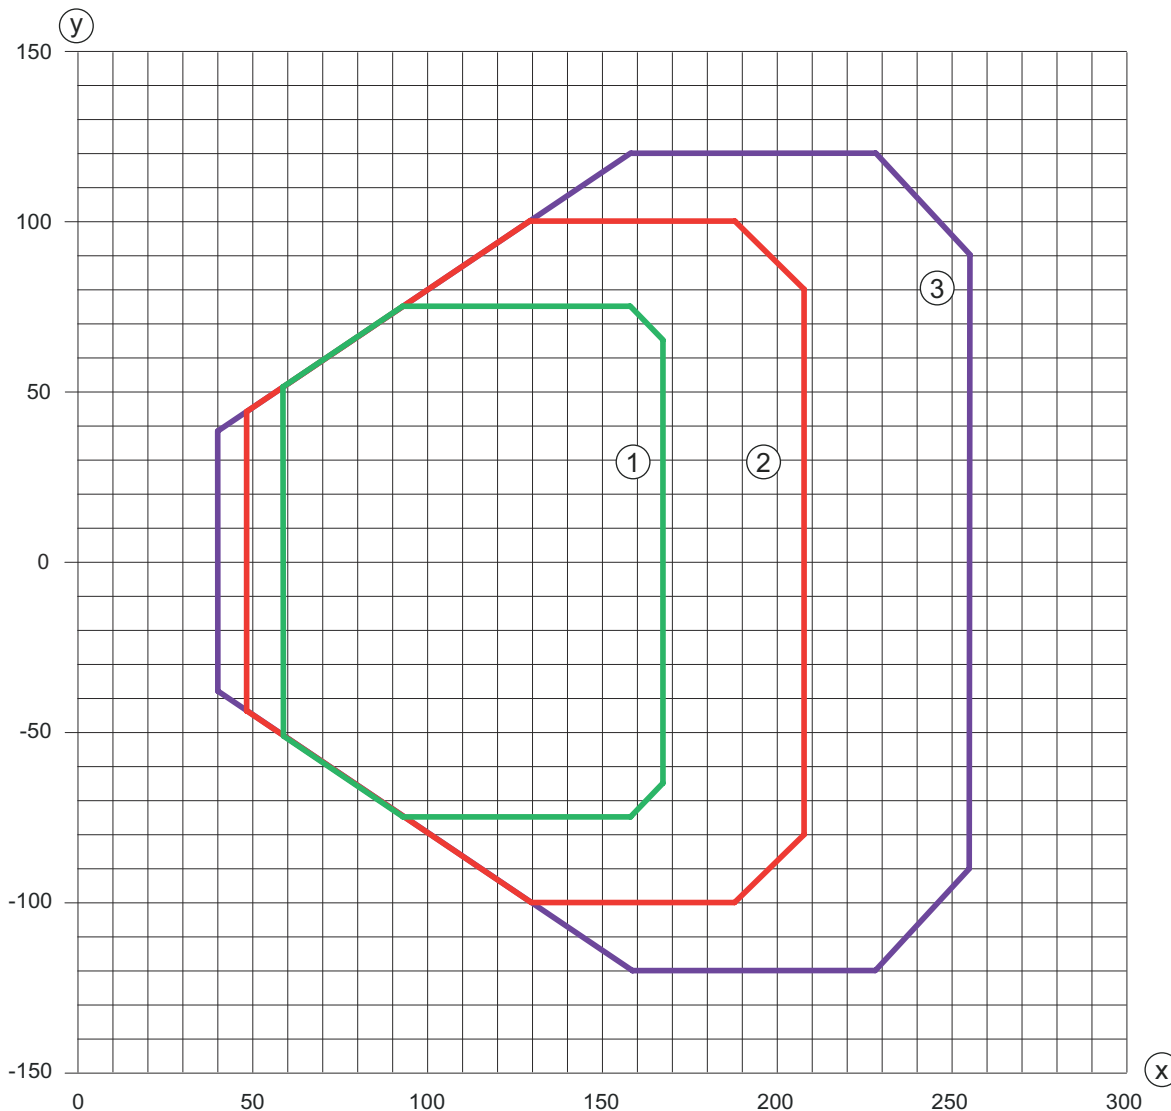

- x Reading distance [mm]
- y Reading field width [mm]
- 1 Module: 0.2 mm
- 2 Module: 0.3 mm
- 3 Module: 0.5 mm

## Operation and display

| LED   | Display                               | Meaning                         |
|-------|---------------------------------------|---------------------------------|
| 1 PWR | Green, flashing                       | Device ok, initialization phase |
|       | Green, continuous light               | Device OK                       |
|       | Green, briefly off - on               | Reading successful              |
|       | green, briefly off - briefly red - on | Reading not successful          |
|       | Orange, continuous light              | Service mode                    |
|       | Red, flashing                         | Device OK, warning set          |
|       | Red, continuous light                 | Error, device error             |
| 2 NET | Green, flashing                       | Initialization                  |
|       | Green, continuous light               | Bus operation ok                |

# Operation and display

| LED    | Display                  | Meaning                            |
|--------|--------------------------|------------------------------------|
| 2 NET  | Red, flashing            | Communication error                |
|        | Red, continuous light    | Bus error                          |
| 3 LINK | Green, continuous light  | Ethernet connection is established |
|        | Yellow, continuous light | Data exchange active               |

## Part number code

Part designation: **BCL XXXX YYZ AAA**


|             |  |
|-------------|--|
| <b>BCL</b>  | <b>Operating principle</b><br>BCL: bar code reader   |
| <b>XXXX</b> | <b>Series/interface (integrated fieldbus technology)</b><br>208i: EtherNet TCP/IP, UDP<br>248i: PROFINET RT<br>258i: EtherNet/IP |
| <b>YY</b>   | <b>Scanning principle</b><br>S: line scanner (single line)<br>R1: line scanner (raster)  |
| <b>Z</b>    | <b>Optics</b><br>M: Medium Density (medium distance)   |
| <b>AAA</b>  | <b>Beam exit</b><br>110: lateral   |


**Note**




A list with all available device types can be found on the Leuze website at [www.leuze.com](http://www.leuze.com).


## Notes

 **Observe intended use!**




- ⌘ This product is not a safety sensor and is not intended as personnel protection.
- ⌘ The product may only be put into operation by competent persons.
- ⌘ Only use the product in accordance with its intended use.


 **WARNING! LASER RADIATION – CLASS 1 LASER PRODUCT**



The device satisfies the requirements of IEC 60825-1:2014 (EN 60825-1:2014) safety regulations for a product of **laser class 1 as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to "Laser Notice No. 56" from May 8, 2019.**

- ⌘ Observe the applicable statutory and local laser protection regulations.
- ⌘ The device must not be tampered with and must not be changed in any way. There are no user-serviceable parts inside the device. Repairs must only be performed by Leuze electronic GmbH + Co. KG.



 **Laser radiation**





- ⌘ Opening the device can lead to dangerous exposure to radiation.

## Accessories


### Connection technology - Connection cables

|   | Part no. | Designation         | Article          | Description  |
|---|----------|---------------------|------------------|--|
|  | 50132079 | KD U-M12-5A-V1-050  | Connection cable | Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 5,000 mm<br>Sheathing material: PVC                                    |
|  | 50135074 | KS ET-M12-4A-P7-050 | Connection cable | Suitable for interface: Ethernet<br>Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin<br>Connection 2: Open end<br>Shielded: Yes<br>Cable length: 5,000 mm<br>Sheathing material: PUR |


### Connection technology - Interconnection cables

|   | Part no. | Designation                 | Article               | Description  |
|---|----------|-----------------------------|-----------------------|--|
|   | 50137078 | KSS ET-M12-4A-M12-4A-P7-050 | Interconnection cable | Suitable for interface: Ethernet<br>Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin<br>Connection 2: Connector, M12, Axial, Male, D-coded, 4 -pin<br>Shielded: Yes<br>Cable length: 1,000 mm<br>Sheathing material: PUR |
|  | 50135081 | KSS ET-M12-4A-RJ45-A-P7-050 | Interconnection cable | Suitable for interface: Ethernet<br>Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin<br>Connection 2: RJ45<br>Shielded: Yes<br>Cable length: 5,000 mm<br>Sheathing material: PUR   |

### Mounting technology - Mounting brackets


|   | Part no. | Designation | Article         | Description   |
|---|----------|-------------|-----------------|---|
|  | 50121433 | BT 300 W    | Mounting device | Design of mounting device: Angle, L-shape<br>Fastening, at system: Through-hole mounting<br>Mounting bracket, at device: Screw type<br>Type of mounting device: Adjustable<br>Material: Metal |

### Mounting technology - Rod mounts


|   | Part no. | Designation | Article         | Description   |
|---|----------|-------------|-----------------|---|
|  | 50121434 | BT 300 - 1  | Mounting device | Design of mounting device: Mounting system<br>Fastening, at system: For 10-16 mm rods<br>Mounting bracket, at device: Screw type<br>Type of mounting device: Turning, 360°, Adjustable<br>Material: Metal |







## Accessories

|  | Part no. | Designation | Article         | Description   |
|--|----------|-------------|-----------------|---|
|  | 50121435 | BT 56 - 1   | Mounting device | Functions: Static applications<br>Design of mounting device: Mounting system<br>Fastening, at system: For 12 mm rod, For 14 mm rod, For 16 mm rod<br>Mounting bracket, at device: Clampable<br>Material: Metal<br>Tightening torque of the clamping jaws: 8 N·m |

## Reflective tapes for standard applications

|   | Part no. | Designation     | Article         | Description   |
|---|----------|-----------------|-----------------|---|
|  | 50106119 | REF 4-A-100x100 | Reflective tape | Design: Rectangular<br>Reflective surface: 100 mm x 100 mm<br>Material: Plastic<br>Chemical designation of the material: PMMA<br>Fastening: Self-adhesive |

## Services

|  | Part no. | Designation | Article                                  | Description   |
|--|----------|-------------|--|---|
|   | S981020  | CS30-E-212  | Hourly rate for "Configuration"          | Details: Compilation of the application data, selection and suggestion of suitable sensor system, drawing prepared as assembly sketch.<br>Conditions: Completed questionnaire or project specifications with a description of the application have been provided.<br>Restrictions: Travel and accommodation charged separately and according to expenditure.  |
|  | S981014  | CS30-S-110  | Start-up support                         | Details: Performed at location of customer's choosing, duration: max. 10 hours.<br>Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.<br>Restrictions: No mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment. |
|  | S981019  | CS30-T-110  | Product training                         | Details: Location and content to be agreed upon, duration: max. 10 hours.<br>Conditions: Price not including travel costs and, if applicable, accommodation expenses.<br>Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.   |
|  | S981021  | CS30-V-212  | Hourly rate for "Bar code qualification" | Details: REA evaluation with creation of a test report, evaluation of the code quality.<br>Conditions: Original bar codes to be provided by the client.   |

### Note



A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.