Leuze

Technical data sheet Light curtain receiver Part no.: 50131695 CML730i-R05-160.R/PN-M12



 The Sensor People
 Leuze electronic GmbH + Co. P

 In der Braike 1, 73277 Owen
 In der Braike 1, 73277 Owen

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com In der Braike 1, 73277 Owen Phone: +49 7021 573-0 • Fax: +49 7021 573-199

We reserve the right to make technical changes eng • 2020-12-25

Technical data

Leuze

Basic data Series 730 **Operating principle** Throughbeam principle Device type Receiver Contains Accessories for the use of the BT-2R1 Application Detection of transparent objects Object measurement **Special version** Special version Crossed-beam scanning Diagonal-beam scanning Parallel-beam scanning **Optical data** Operating range Guaranteed operating range **Operating range** 0.1 ... 4.5 m Operating range, transparent media 0.1 ... 1.75 m **Operating range limit** Typical operating range Operating range limit 0.1 ... 6 m Measurement field length 160 mm Number of beams 32 Piece(s) Beam spacing 5 mm **Measurement data** Minimum object diameter 10 mm **Electrical data** Protective circuit Polarity reversal protection Short circuit protected Transient protection Performance data Supply voltage U_B 18 ... 30 V, DC 0 ... 15 %, From U_B **Residual ripple Open-circuit current** 0 ... 135 mA, The specified values refer to the entire package consisting of transmitter and receiver. Inputs/outputs selectable Output current, max. 100 mA Input resistance 6,000 Ω Number of inputs/outputs selectable 2 Piece(s) Туре Inputs/outputs selectable Voltage type, outputs DC Switching voltage, outputs Typ. U_B / 0 V Voltage type, inputs DC Switching voltage, inputs high: ≥6V low: ≤4V Input/output 1 Activation/disable delay 1 ms Timing

Readiness delay	1,500 ms
Cycle time	1 ms
Response time per beam	10 µs

Interface

Туре

PROFINET

Profinet	
Function	Process
Conformance class	В
Protocol	PROFINET RT
Switch functionality	Integrated
Transmission speed	10 Mbit/s
	100 Mbit/s
Service interface	
Туре	IO-Link
.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	
IO-Link	
Function	Configuration via software
	Service
Connection	
Number of connections	3 Piece(s)
Plug outlet	Rear side
Connection 1	
Function	Configuration interface
	Connection to transmitter
	Signal IN
	Signal OUT Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded
Connection 2	
Function	BUS IN
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	4 -pin
Encoding	D-coded
Connection 3	
Function	BUS OUT
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	4 -pin
Encoding	D-coded
Mechanical data	
Design	Cubic
Dimension (W x H x L)	29 mm x 35.4 mm x 183 mm
Housing material	Metal
Metal housing	Aluminum
Lens cover material	Plastic
Net weight	400 g
Housing color	Silver
Type of fastening	Groove mounting Via optional mounting device

2/9

Technical data

Leuze

Operation and display

Type of display	LED
	OLED display
Number of LEDs	4 Piece(s)
Type of configuration	Software
	Teach-in
Operational controls	Membrane keyboard
Environmental data	
Ambient temperature, operation	-30 60 °C

Ambient temperature, operation Ambient temperature, storage

Certifications

Degree of protection	IP 65	
Protection class	III	
Certifications	c CSA US	
Standards applied	IEC 60947-5-2	


-40 ... 70 °C

Classification

Customs tariff number	90314990
eCl@ss 5.1.4	27270910
eCl@ss 8.0	27270910
eCl@ss 9.0	27270910
eCl@ss 10.0	27270910
eCl@ss 11.0	27270910
ETIM 5.0	EC002549
ETIM 6.0	EC002549
ETIM 7.0	EC002549

Dimensioned drawings

All dimensions in millimeters

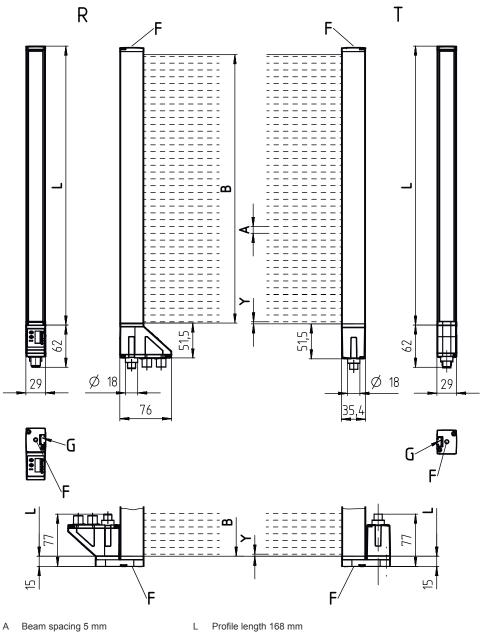

В Measurement field length 160 mm

M6 thread

Fastening groove

F


G

- Т Transmitter
- R Receiver
- Υ 2.5 mm



Leuze

Dimensioned drawings




- A PWR / SW IN / OUT B BUS IN
- C BUS OUT

Electrical connection

Connection 1	X1
Function	Configuration interface
	Connection to transmitter
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

Pin Pin assignment


1	V+		
2	I/O 1		
3	GND		
4	IO-Link		
5	I/O 2		
6	RS 485 Tx+		
7	RS 485 Tx+		
8	FE/SHIELD		



Connection 2	X2A
Function	BUS IN
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	4 -pin
Encoding	D-coded

Pin Pin assignment

1	TD0+
2	RD0+
3	TD0-
4	RD0-



Electrical connection


Leuze

Connection 3

Function	BUS OUT
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	4 -pin
Encoding	D-coded

X2B

Pin	Pin assignment
1	TD0+
2	RD0+
3	TD0-
4	RD0-



Operation and display

LED	Display	Meaning
1	Green, continuous light	Operational readiness
	Green, flashing	Teach / error
2	Yellow, continuous light	Light path free, with function reserve
	Yellow, flashing	No function reserve
	Off	Object detected
3	Green, continuous light (at the X2A / X2B connector)	Link
4	Yellow, continuous light (at the X2A / X2B connector)	Activity

Suitable transmitters

 Part no.	Designation	Article	Description
50118913	CML730i-T05-160.R- M12	Light curtain transmitter	Operating range: 0.1 4 m Connection: Connector, M12, Rear side, 5 -pin

Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

Operating principle Measuring light curtain					
Series 720i: 720i series 730i: 730i series					
Device type T: transmitter R: receiver					
Beam spacing 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm					
Measurement field length [mm], dependent on beam spacing					
Equipment A: connector outlet, axial R: rear connector outlet					

Part number code



CCC	Interface L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus					
DDD	Special equipment -PS: Power Setting					
EEE	Electrical connection M12: M12 connector					
FFF	-EX: Explosion protection					
Not	le					
	A list with all available device types can be found on the Leuze website at www.leuze.com.					

Notes

Observe intended use!
 This product is not a safety sensor and is not intended as personnel protection. The product may only be put into operation by competent persons. Only use the product in accordance with its intended use.

For UL applications:

✤ For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).

These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

Accessories

Connection technology - Connection cables

	Part no.	Designation	Article	Description
	50132079	KD U-M12-5A-V1- 050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Open end Shielded: No Cable length: 5,000 mm Sheathing material: PVC
W	50135074	KS ET-M12-4A-P7- 050	Connection cable	Suitable for interface: Ethernet Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin Connection 2: Open end Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

Accessories

Leuze

Connection technology - Interconnection cables

	Part no.	Designation	Article	Description
	50135081	KSS ET-M12-4A- RJ45-A-P7-050	Interconnection cable	Suitable for interface: Ethernet Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin Connection 2: RJ45 Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

Connection technology - Y distribution cables

	Part no.	Designation	Article	Description
	50118183	K-Y1 M12A-5m- M12A-S-PUR	Interconnection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Connection 3: Connector, M12, Axial, Female, A-coded, 8 -pin Shielded: Yes Cable length fork 1: 5,000 mm Cable length fork 2: 150 mm Sheathing material: PUR

Mounting technology - Mounting brackets

 Part no.	Designation	Article	Description
 50142900	BT 700M.5-2SET	Mounting device set	Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

Mounting technology - Swivel mounts

	Part no.	Designation	Article	Description
RR.	429046	BT-2R1	Mounting bracket set	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 360° Material: Metal, Plastic

Configuration devices

 Part no.	Designation	Article	Description
50121098	SET MD12-US2-IL1.1 + Zub.	Diagnostics set	Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20

Accessories

Leuze

Services

	Part no.	Designation	Article	Description
с. С	S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: No mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.
	S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.

	Note
6	☆ A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.