

Technical data sheet Throughbeam photoelectric sensor

Part no.: 50122705

LE328.W/4P



Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- Operation and display
- Suitable transmitters
- Part number code
- Notes
- Further information
- Accessories







Technical data



Basic data

Series	328
Operating principle	Throughbeam principle
Device type	Receiver
Special version	

Special version 90° - angular optics

Optical data

Operating range	Guaranteed operating range
Operating range	0 5.5 m
Operating range limit	Typical operating range
Operating range limit	0 8 m

Electrical data

Protective circuit	Polarity reversal protection
	Short circuit protected

Performance data

Supply voltage U _B	10 30 V, DC, Incl. residual ripple
Residual ripple	0 15 %, From U _B
Open-circuit current	0 15 mA

Outputs

Number of digital switching outputs 2 Piece(s)

Switching outputs

Voltage type	DC
Switching current, max.	100 mA
Switching voltage	high: ≥(U _B -2V)
	Low: <2\/

Switching output 1

Switching element	Transistor, PNP
Switching principle	Light switching

Switching output 2

Switching element	Transistor, PNP
Switching principle	Dark switching

Timing

Switching frequency	500 Hz
Response time	1 ms
Readiness delay	300 ms

Connection

Connection 1	
Function	Signal OUT
	Voltage supply
Type of connection	Cable
Cable length	2,000 mm
Sheathing material	PUR
Cable color	Black
Number of conductors	4 -wire
Wire cross section	0.2 mm ²

Mechanical data

Thread size	M18 x 1 mm
Dimension (Ø x L)	18 mm x 61 mm
Housing material	Plastic
	Stainless steel
Stainless steel housing	V2A
Plastic housing	ABS
Lens cover material	Plastic
Net weight	70 g
Housing color	Black
	Silver

Operation and display

Type of display	LED
Number of LEDs	1 Piece(s)

Environmental data

Ambient temperature, operation	-40 60 °C
Ambient temperature, storage	-40 70 °C

Certifications

Degree of protection	IP 67
Protection class	III
Certifications	c UL US
Standards applied	IEC 60947-5-2


Classification

Customs tariff number	85365019
eCI@ss 5.1.4	27270901
eCI@ss 8.0	27270901
eCI@ss 9.0	27270901
eCI@ss 10.0	27270901
eCI@ss 11.0	27270901
ETIM 5.0	EC002716
ETIM 6.0	EC002716
ETIM 7.0	EC002716

Dimensioned drawings

Leuze

All dimensions in millimeters

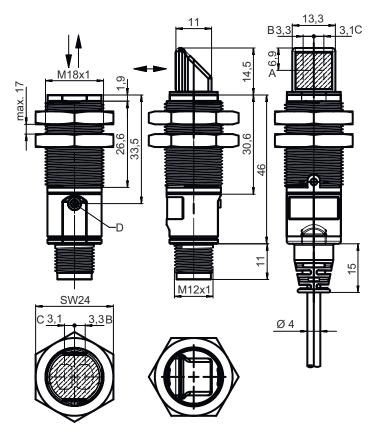

- A Vertical position of the optical axis
- Optical axis (transmitter)
- C Optical axis (receiver)
- D Indicator diode

Electrical connection

Connection 1

Function	Signal OUT
	Voltage supply
Type of connection	Cable
Cable length	2,000 mm
Sheathing material	PUR
Cable color	Black
Number of conductors	4 -wire
Wire cross section	0.2 mm²

Conductor color


Conductor assignment

Brown	V+	
White	OUT 2	
Blue	GND	
Black	OUT 1	


Diagrams



Typ. response behavior



- Distance [m]
- Misalignment [mm]



Operation and display

LED	Display	Meaning
1	Green, continuous light	Operational readiness
	Yellow, continuous light	Light path free
	Yellow, flashing	No function reserve

Suitable transmitters

Part no.	Designation	Article	Description
50122701	LS328.W/9D	Throughbeam photoelectric sensor transmitter	Special version: 90° - angular optics, Deactivation input Operating range limit: 0 8 m Light source: LED, Red Supply voltage: DC Deactivation inputs: 2 Piece(s) Connection: Cable, 2,000 mm, 4 -wire

Part number code

Part designation: XXX328BY-AAAF.BB/CC-DDD

XXX328	Operating principle PRK: retro-reflective photoelectric sensor with polarization filter ET: energetic diffuse reflection sensor FT: diffuse reflection sensor with fading LE: throughbeam photoelectric sensor receiver LS: throughbeam photoelectric sensor transmitter
Y	Light type n/a: red light I: infrared light
AAAF	Preset range (optional) n/a: operating range acc. to data sheet xxxF: preset range [mm]
ВВ	Equipment n/a: axial optics W: 90° angular optics 3: teach-in via button

Part number code



CC Switching output / function (OUT1 = pin 4, OUT2 = pin 2):

4: PNP transistor output, light switching

P: PNP transistor output, dark switching

2: NPN transistor output, light switching N: NPN transistor output, dark switching

9: input for transmitter deactivation (deactivation with HIGH signal)

D: input for transmitter deactivation (deactivation with LOW signal)

X: pin not used

DDD **Electrical connection**

n/a: cable, standard length 2000 mm, 4-wire

M12: M12 connector, 4-pin (plug)

Note



♦ A list with all available device types can be found on the Leuze website at www.leuze.com.

Notes



Observe intended use!



\$ This product is not a safety sensor and is not intended as personnel protection.

- The product may only be put into operation by competent persons.
- Only use the product in accordance with its intended use.

For UL applications:



- 🖖 For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).
- These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

Further information

• Sum of the output currents for both outputs, 50 mA for ambient temperatures > 40 °C

Accessories

Mounting technology - Mounting brackets

Part no. Article Designation **Description** 50113548 BT D18M.5 Mounting bracket



Diameter, inner: 18 mm Design of mounting device: Angle, L-shape Fastening, at system: Through-hole mounting Mounting bracket, at device: Screw type Type of mounting device: Rigid Material: Stainless steel

Accessories



Mounting technology - Rod mounts

	Part no.	Designation	Article	Description
Of:	50117490	BTU D18M-D12	Mounting system	Design of mounting device: Mounting system Fastening, at system: Through-hole mounting Mounting bracket, at device: Screw type Type of mounting device: Clampable, Adjustable, Turning, 360° Material: Metal

Mounting technology - Other

	Part no.	Designation	Article	Description
	50083189	BT 318-ARH	Adjustment fastening part	Design of mounting device: Mounting plate Fastening, at system: Through-hole mounting Mounting bracket, at device: Screw type Type of mounting device: Swiveling, Adjustable Material: Metal
00	50126631 **	BT 328M	Fastening	Design of mounting device: Mounting clamp Fastening, at system: For 18 mm rod, Through-hole mounting Mounting bracket, at device: Screw type Type of mounting device: Turning, 360° Material: Stainless steel

^{**} Included in delivery contents

Note



A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.