

Technical data sheet Throughbeam photoelectric sensor

Part no.: 50137172

LS3C.B/XX-M8



Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- Operation and display
- Suitable receivers
- Part number code
- Notes
- Further information
- Accessories











Technical data



Basic data

Series	3C
Operating principle	Throughbeam principle
Device type	Transmitter

Optical data

Operating range	Guaranteed operating range
Operating range	0.05 8.5 m
Operating range limit	Typical operating range
Operating range limit	0.05 10 m
Beam path	Divergent
Light source	LED, Red
LED light wavelength	632 nm
Transmitted-signal shape	Pulsed
LED group	Exempt group (in acc. with EN 62471)
Light spot size [at sensor distance]	4 mm [100 mm]
Type of light spot geometry	Round

Electrical data

Protective circuit		Polarity reversal protection
		Short circuit protected
	Performance data	
	Supply voltage U _B	10 30 V, DC, Incl. residual ripple
	Residual ripple	0 15 %, From U _B
	Open-circuit current	0 20 mA
	Inputs	
	Activation inputs Switching voltage	hiah; ≥8V

Low: ≤2V

Timing

Readiness delay 300 ms

Connection

Connection 1		
Function	Voltage supply	
Type of connection	Connector	
Thread size	M8	
Type	Male	
Material	Metal	
No. of pins	4 -pin	

Mechanical data

Dimension (W x H x L)	11.4 mm x 34.2 mm x 18.3 mm
Housing material	Plastic
Plastic housing	PC-ABS
Lens cover material	Plastic / PMMA
Net weight	10 g
Housing color	Red
Type of fastening	Two M3 threaded sleeves
	Via optional mounting device
Compatibility of materials	ECOLAB

Operation and display

Type of display	LED
Number of LEDs	2 Piece(s)

Environmental data

Ambient temperature, operation	-40 60 °C	
Ambient temperature, storage	-40 70 °C	

Certifications

Degree of protection	IP 67
	IP 69K
Protection class	III
Certifications	c UL US
Standards applied	IEC 60947-5-2


Classification

Customs tariff number	85365019	
eCI@ss 5.1.4	27270901	
eCI@ss 8.0	27270901	
eCI@ss 9.0	27270901	
eCI@ss 10.0	27270901	
eCI@ss 11.0	27270901	
ETIM 5.0	EC002716	
ETIM 6.0	EC002716	
ETIM 7.0	EC002716	

Dimensioned drawings

Leuze

All dimensions in millimeters

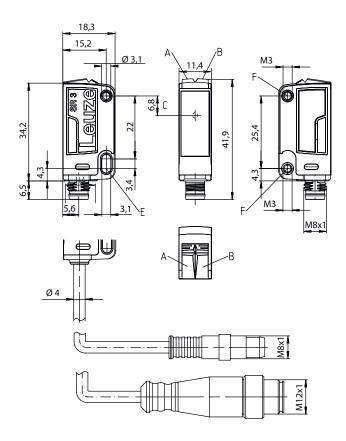

- A Green LED
- B Yellow LED
- C Optical axis
- E Mounting sleeve (standard)

Phone: +49 7021 573-0 • Fax: +49 7021 573-199

F Threaded sleeve (3C.B series)

Electrical connection

Connection 1

Function	Voltage supply
Type of connection	Connector
Thread size	M8
Туре	Male
Material	Metal
No. of pins	4 -pin


Pin	Pin assignment
1	V+
2	n.c.
3	GND
4	n.c.




Diagrams

Leuze

Typ. response behavior

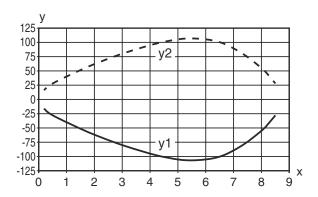

- x Distance [m]
- y Misalignment [mm]



Operation and display

LED	Display	Meaning
1	Green, continuous light	Operational readiness
2	Yellow, continuous light	Transmitted beam active

Suitable receivers

Part no.	Designation	Article	Description
50137190	LE3C.B/4W-M8	Throughbeam photoelectric sensor receiver	Special version: Warning output Operating range limit: 0.05 10 m Supply voltage: DC Digital switching outputs: 2 Piece(s) Switching output 1: Transistor, PNP, Light switching Switching output 2: Transistor, PNP, UB switching Switching frequency: 1,000 Hz Connection: Connector, M8, Metal, 4 -pin
50137181	LE3C.B/6G-M8	Throughbeam photoelectric sensor receiver	Operating range limit: 0.05 10 m Supply voltage: DC Digital switching outputs: 2 Piece(s) Switching output 1: Transistor, Push-pull, Light switching (PNP)/dark switching (NPN) Switching output 2: Transistor, Push-pull, Dark switching (PNP)/light switching (NPN) Switching frequency: 1,000 Hz Connection: Connector, M8, Metal, 4 -pin
50137193	LE3C.B/LP-M8	Throughbeam photoelectric sensor receiver	Operating range limit: 0.05 10 m Supply voltage: DC Digital switching outputs: 2 Piece(s) Switching output 1: Transistor, Push-pull, IO-Link / light switching (PNP)/dark switching (NPN) Switching output 2: Transistor, PNP, Dark switching Switching frequency: 1,000 Hz Interface: IO-Link Connection: Connector, M8, Metal, 4 -pin

Suitable receivers



Part no.	Designation	Article	Description
50137183	LE3C.B1/6G-M8	Throughbeam photoelectric sensor receiver	Operating range limit: 0.05 10 m Supply voltage: DC Digital switching outputs: 2 Piece(s) Switching output 1: Transistor, Push-pull, Light switching (PNP)/dark switching (NPN) Switching output 2: Transistor, Push-pull, Dark switching (PNP)/light switching (NPN) Switching frequency: 1,000 Hz Connection: Connector, M8, Metal, 4 -pin Operational controls: 270° potentiometer

Part number code

Part designation: AAA 3C d EE-f.GG H/i J-K

AAA3C Operating principle / construction H3SC: diffuse reflection sensor with background suppression L3SC: throughbeam photoelectric sensor transmitter L2SC: throughbeam photoelectric sensor receiver PRKSC: retro-reflective photoelectric sensor with polarization filter d Light type na: red light Lintrared light L1: infrared light L1: laser class 1 L2: loser class 2 L1: loser class 2 L1: loser class 3 L2: loser class 2 L2: loser class 3 L2: loser class 3 L2: loser class 3 L3: loser class 4 L3: loser class 4 L3: loser class 5 L3: loser class 5 L3: loser class 5 L3: loser class 6 L4: loser class 6 L5: loser class 6 L6: loser class 7 L3: loser class 7 L3: loser class 8 L3: losuring model with two M3 threaded seleves, brass L3: losuring model with two M3 threaded sleeves, brass L3: losuring model with two M3 threaded sleeves, brass L3: losuring model with two M3 threaded sleeves, brass L3: losuring model with two M3 threaded sleeves, brass L3: loser loses 7 L3: loser loses 7 L3: loser loses 7 L3: loser loses 7 L3: loser loses 8 L3: loser loses	
n/a: red light l: infrared light l: infrared light EE Light source n/a: LED L1: laser class 1 L2: laser class 2 f Preset range (optional) n/a: operating range act. to data sheet xxxF: preset range (put) xxxF: preset range (mm) GG Equipment n/a: standard A: autocollimation principle (single lens) for positioning tasks B: nousing model with two M3 threaded sleeves, brass F: permanently set range L: long light spot S: small light spot S: small light spot T: autocollimation principle (single lens) for highly transparent bottles without tracking TT: autocollimation principle (single lens) for highly transparent bottles without tracking V: V-Optics XL: extra long light spot X: extended model H Operating range adjustment n/a with HT: range adjustable via 8-turn potentiometer n/a with HT: range adjustable via 8-turn potentiometer n/a with reto-reflective photoelectric sensors (PRK): operating range not adjustable 1: 270° potentionneter 3: teach-in via button 6: auto-teach i Switching output/function OUT 1/IN: Pin 4 or black conductor 2: NPN transistor output, light switching N: NPN transistor output, light switching P: PNP transistor output, light switching P: PNP transistor output, light switching P: PNP transistor output, light switching D: L: IO-Link Infariace (SIO mode : PNP light switching) D: Club, Infariace (SIO mode : PNP light switching) D: Activation input (activation with high signal) D: IO-Link Infariace (SIO mode : PNP) light switching P: PNP transistor output, light switching P: PNP transistor output, light switching P: IO-Link Infariace (SIO mode : PNP light switching) P: PNP transistor output, light switching P: PNP transistor o	
n/a: LED L1: laser class 1 L2:	
n/a: operating range acc. to data sheet xxxF: preset range [mm] GG Equipment n/a: standard A: autocollimation principle (single lens) for positioning tasks B: housing model with two M3 threaded sleeves, brass F: permanently set range L: long light spot S: small light spot T: autocollimation principle (single lens) for highly transparent bottles without tracking TT: autocollimation principle (single lens) for highly transparent bottles without tracking TT: autocollimation principle (single lens) for highly transparent bottles with tracking V: V-optics XL: extra long light spot X: extended model H Operating range adjustment n/a with HT: range adjustable via 8-turn potentiometer n/a with retror-effective photoelectric sensors (PRK): operating range not adjustable 1: 270° potentiometer 3: teach-in via button 6: auto-teach i Switching output/function OUT 1/IN: Pin 4 or black conductor 2: NPN transistor output, dark switching N: NPN transistor output, light switching P: PNP transistor output, light switching P: PNP transistor output, light switching P: PNP transistor output, light switching NPN light switching G: push-pull switching output, PNP light switching, NPN dark switching G: push-pull switching output, PNP light switching, NPN dark switching NPN light switchi	
n/a: standard A: autocollimation principle (single lens) for positioning tasks B: housing model with two M3 threaded sleeves, brass F: permanently set range L: long light spot S: small light spot T: autocollimation principle (single lens) for highly transparent bottles without tracking TT: autocollimation principle (single lens) for highly transparent bottles with tracking V: V-optics XL: extra long light spot X: extended model H Operating range adjustment n/a with HT: range adjustable via 8-turn potentiometer n/a with retro-reflective photoelectric sensors (PRK): operating range not adjustable 1: 270° potentiometer 3: teach-in via button 6: auto-teach i Switching output/function OUT 1/IN: Pin 4 or black conductor 2: NPN transistor output, light switching N: NPN transistor output, dark switching 4: PPN transistor output, dark switching P: PNP transistor output, dark switching G: push-pull switching output, PNP light switching, NPN dark switching B: activation input (activation with high signal) X: pin not used 1: IO-Link / light switching (NPN) / dark switching (PNP) Switching output / function OUT 2IN: pin 2 or white conductor 2: NPN transistor output, light switching N: NPN transistor output, light switching	
n/a with HT: range adjustable via 8-turn potentiometer n/a with retro-reflective photoelectric sensors (PRK): operating range not adjustable 1: 270° potentiometer 3: teach-in via button 6: auto-teach i Switching output/function OUT 1/IN: Pin 4 or black conductor 2: NPN transistor output, light switching N: NPN transistor output, dark switching 4: PNP transistor output, dark switching P: PNP transistor output, dark switching 6: push-pull switching output, PNP light switching, NPN dark switching G: push-pull switching output, PNP dark switching, NPN light switching L: IO-Link interface (SIO mode: PNP light switching, NPN dark switching) 8: activation input (activation with high signal) X: pin not used 1: IO-Link / light switching (NPN) / dark switching (PNP) J Switching output / function OUT 2/IN: pin 2 or white conductor 2: NPN transistor output, light switching N: NPN transistor output, light switching 4: PNP transistor output, light switching	
2: NPN transistor output, light switching N: NPN transistor output, dark switching 4: PNP transistor output, light switching P: PNP transistor output, dark switching 6: push-pull switching output, PNP light switching, NPN dark switching G: push-pull switching output, PNP dark switching, NPN light switching L: IO-Link interface (SIO mode: PNP light switching, NPN dark switching) 8: activation input (activation with high signal) X: pin not used 1: IO-Link / light switching (NPN) / dark switching (PNP) Switching output / function OUT 2/IN: pin 2 or white conductor 2: NPN transistor output, light switching N: NPN transistor output, dark switching 4: PNP transistor output, light switching	
2: NPN transistor output, light switching N: NPN transistor output, dark switching 4: PNP transistor output, light switching	
P: PNP transistor output, dark switching 6: push-pull switching output, PNP light switching, NPN dark switching G: push-pull switching output, PNP dark switching, NPN light switching W: warning output X: pin not used 8: activation input (activation with high signal) 9: deactivation input (deactivation with high signal) T: teach-in via cable	

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com

We reserve the right to make technical changes

The Sensor People In der Braike 1, 73277 Owen

Phone: +49 7021 573-0 • Fax: +49 7021 573-199 eng • 2021-01-19

Part number code



κ

Electrical connection

n/a: cable, standard length 2000 mm, 4-wire 5000: cable, standard length 5000 mm, 4-wire

M8: M8 connector, 4-pin (plug) M8.3: M8 connector, 3-pin (plug)

200-M8: cable, length 200 mm with M8 connector, 4-pin, axial (plug) 200-M8.3: cable, length 200 mm with M8 connector, 3-pin, axial (plug) 200-M12: cable, length 200 mm with M12 connector, 4-pin, axial (plug)

Note



 $\$ A list with all available device types can be found on the Leuze website at www.leuze.com.

Notes



Observe intended use!



- ♥ This product is not a safety sensor and is not intended as personnel protection.
- Only use the product in accordance with its intended use.

For UL applications:



- 🔖 For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).
- These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/CYJV7 or PVVA/PVVA7)

Further information

• Light source: Average life expectancy 100,000 h at an ambient temperature of 25 °C

Accessories

Connection technology - Connection cables

	Part no.	Designation	Article	Description
<i>!/</i>	50130850	KD U-M8-4A-V1-050	Connection cable	Connection 1: Connector, M8, Axial, Female, 4 -pin Connection 2: Open end Shielded: No Cable length: 5,000 mm Sheathing material: PVC

Accessories



Part no.	Designation	Article	Description
50130871	KD U-M8-4W-V1-050	Connection cable	Connection 1: Connector, M8, Angled, Female, 4 -pin Connection 2: Open end Shielded: No Cable length: 5,000 mm Sheathing material: PVC

Mounting technology - Mounting brackets

	Part no.	Designation	Article	Description
1	50060511	BT 3	Mounting device	Design of mounting device: Angle, L-shape Fastening, at system: Through-hole mounting Mounting bracket, at device: Screw type Type of mounting device: Rigid Material: Metal

Mounting technology - Rod mounts

0	•			
	Part no.	Designation	Article	Description
00	50117829	BTP 200M-D12	Mounting system	Design of mounting device: Protection hood Fastening, at system: For 12 mm rod Mounting bracket, at device: Screw type Type of mounting device: Clampable, Adjustable, Turning, 360° Material: Metal
	50117255	BTU 200M-D12	Mounting system	Design of mounting device: Mounting system Fastening, at system: For 12 mm rod, Sheet-metal mounting Mounting bracket, at device: Screw type, Suited for M3 screws Type of mounting device: Clampable, Adjustable, Turning, 360° Material: Metal

Note



A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.